







DN 20

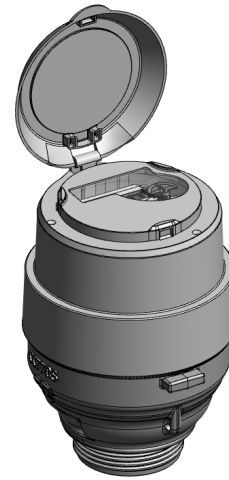

Manifold




Maximum 3 months
3 mois maximum
Maximal 3 Monate
Máximo 3 meses
Maksymalnie 3 miesiące

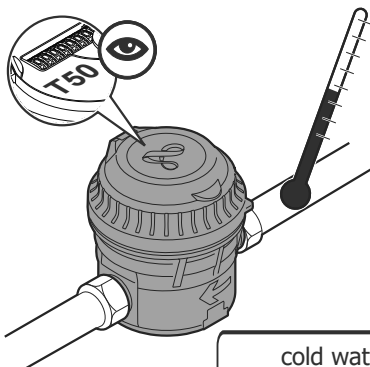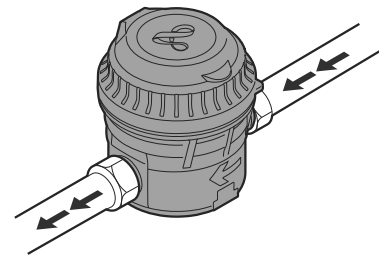

50 °C max.



cold water
eau froide
kaltes Wasser
agua fria
woda zimna

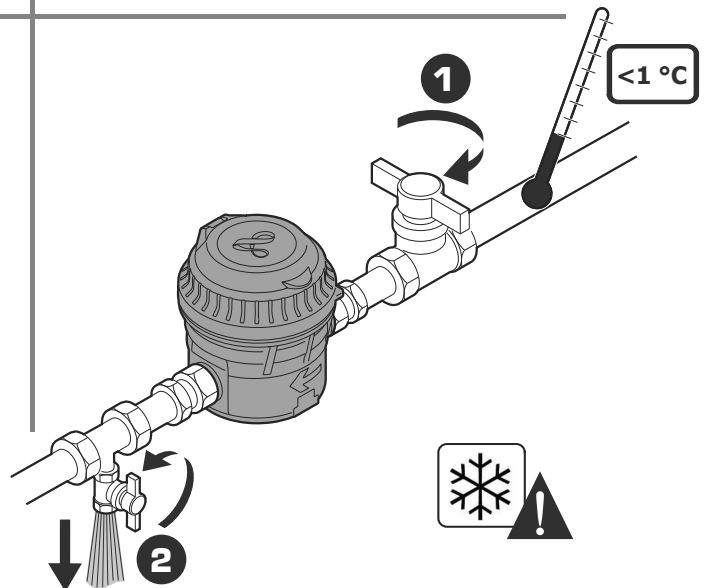




<1 °C




ALTAIR V5






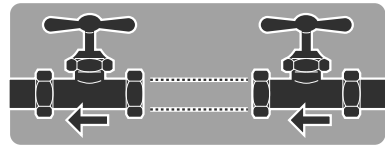
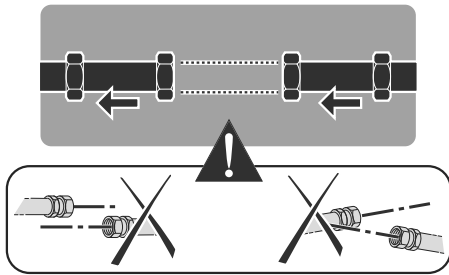


U0 / D0

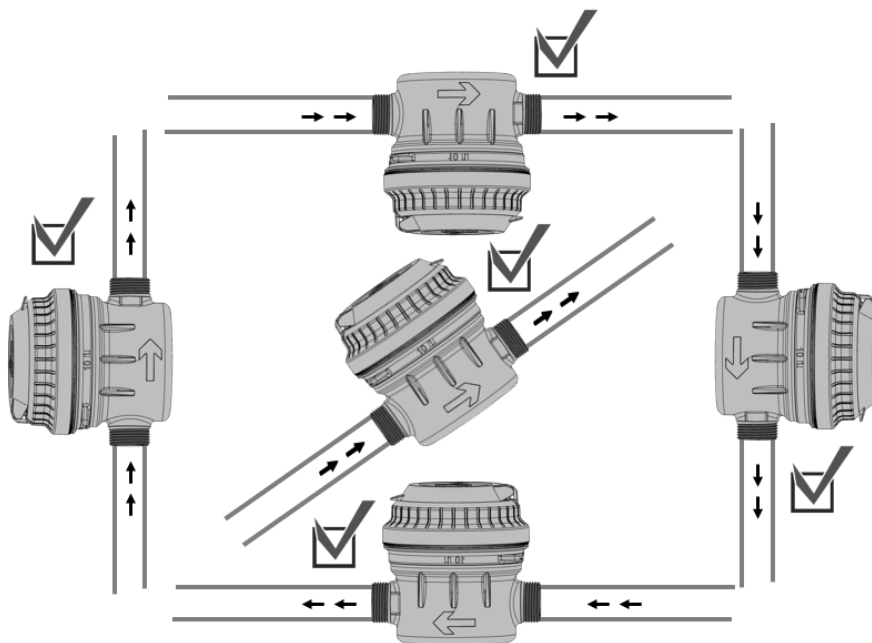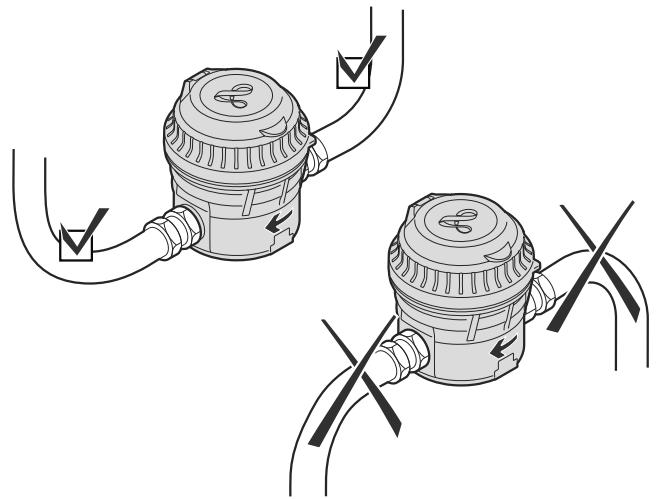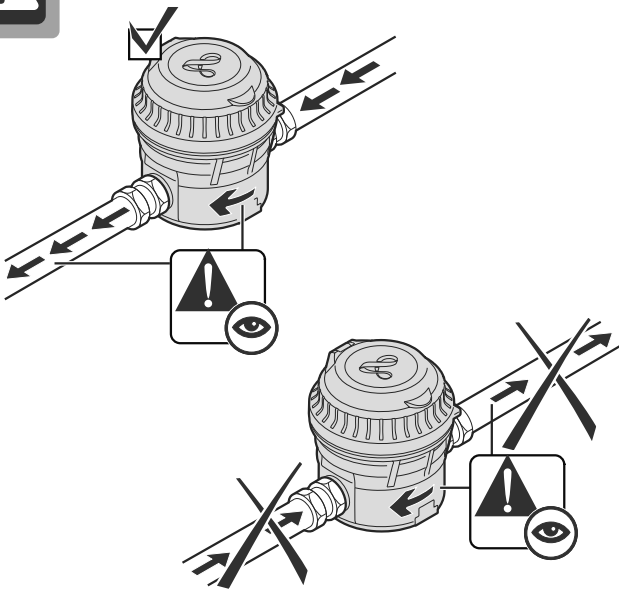

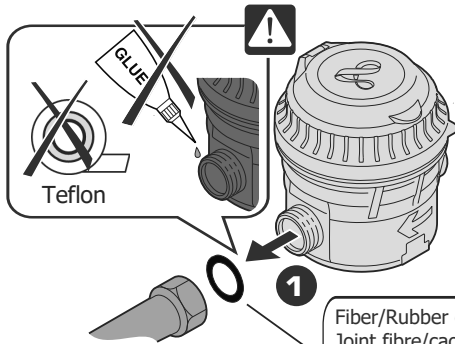



Fiber/Rubber o-ring
 Joint fibre/caoutchouc
 Faser/Gummi o-Ring
 Anillo de fibra/de goma
 Uszczelka gumowa/fibrowa

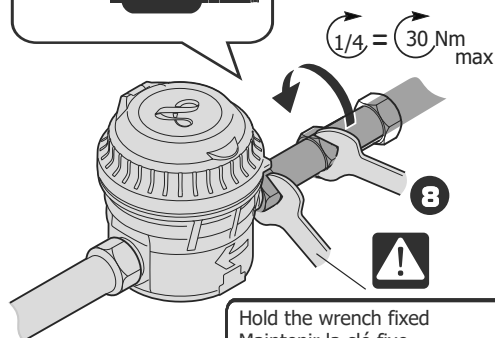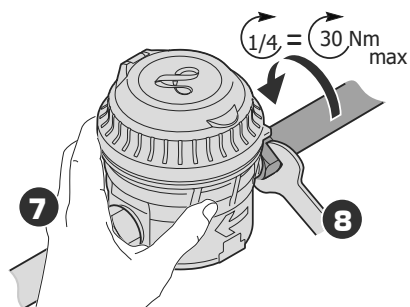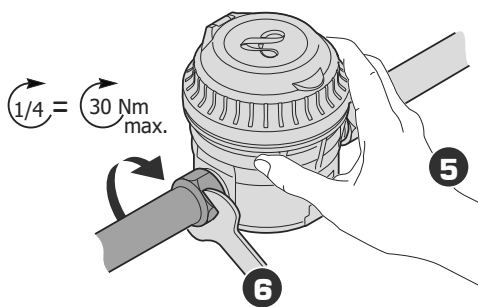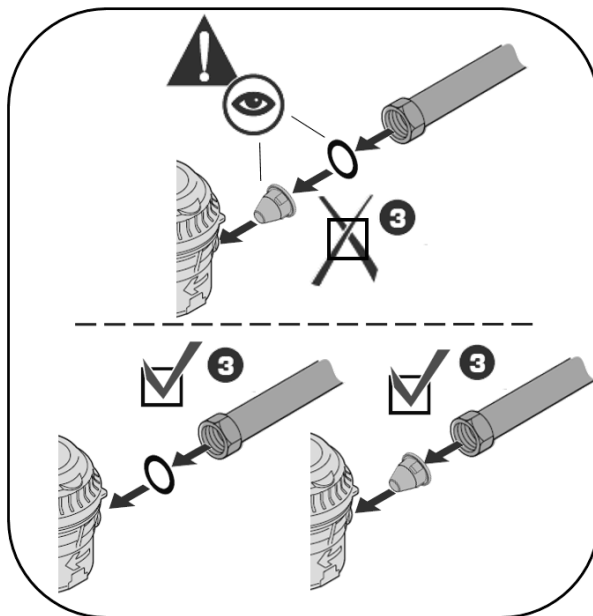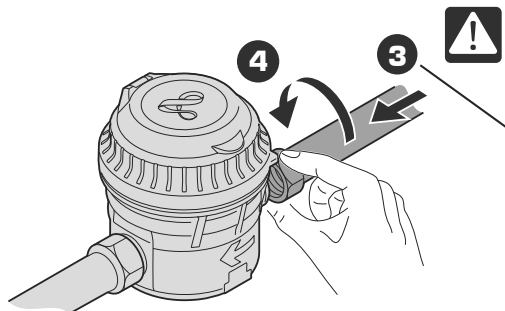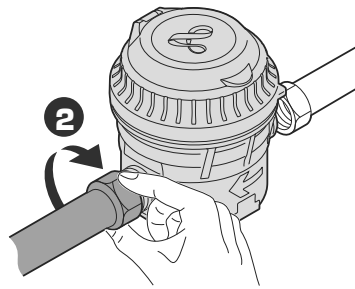


Hold the wrench fixed
 Maintenir la clé fixe
 Den Schraubenschlüssel festhalten
 Mantener la llave fija
 Trzymaj klucz nieruchomo




Manifold

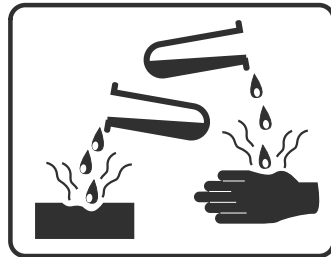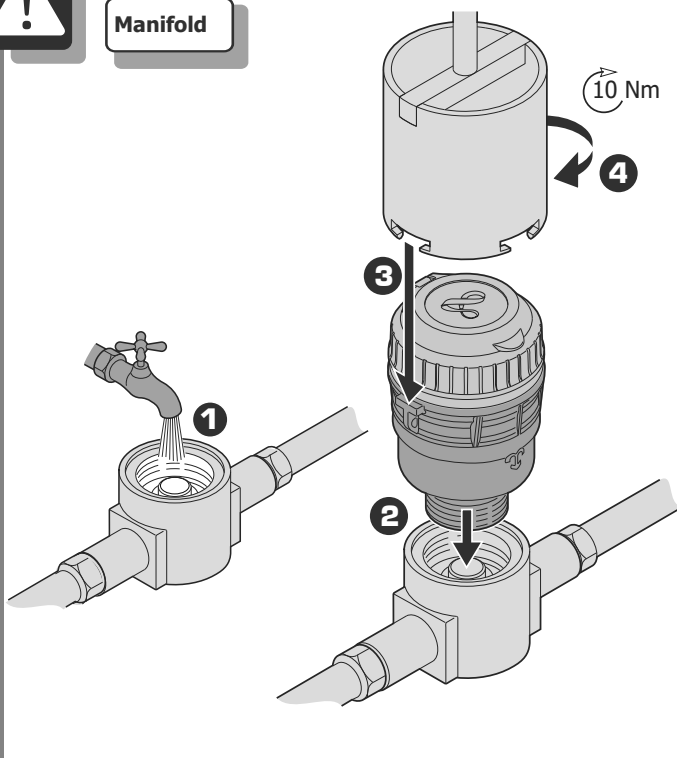

16 Bar max.

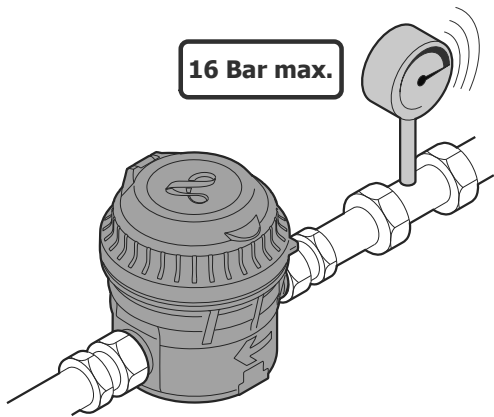


Q4 max.

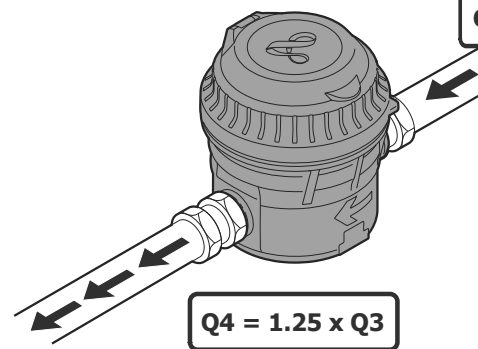

0.1 g/l max.

Ø 0.1mm max.

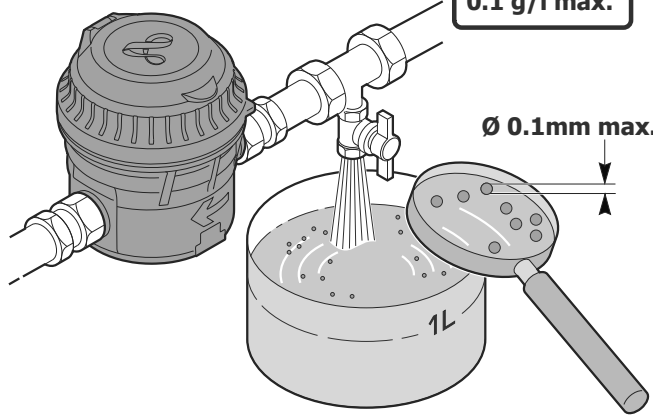

80 kg max.

