



ALTAIR V5

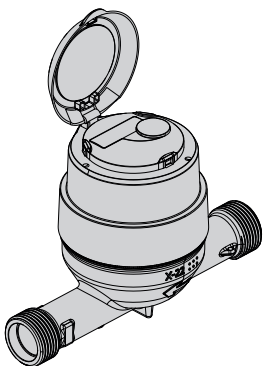

DN 15 / DN 20

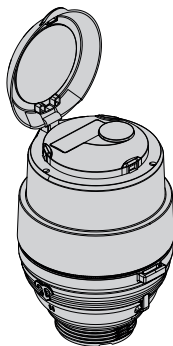

Manifold



min.
-10°C



max.
+55°C




Maximum 3 month
Maximal 3 Monate
3 Mois maximum
Máximo 3 meses
Maksymalnie 3 miesiące





min.
+1°C












max.
+55°C



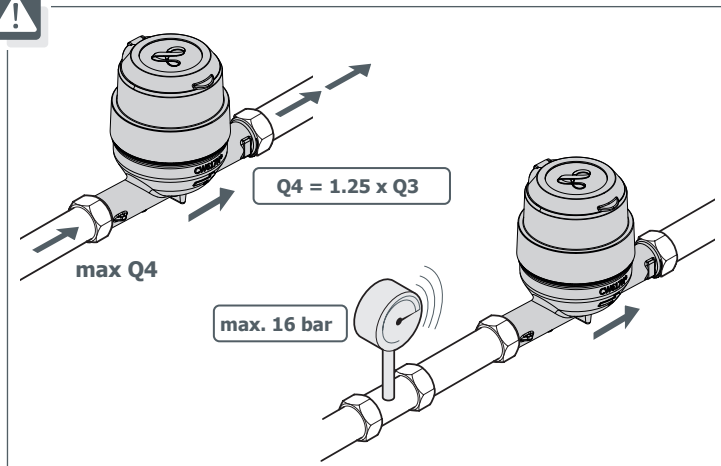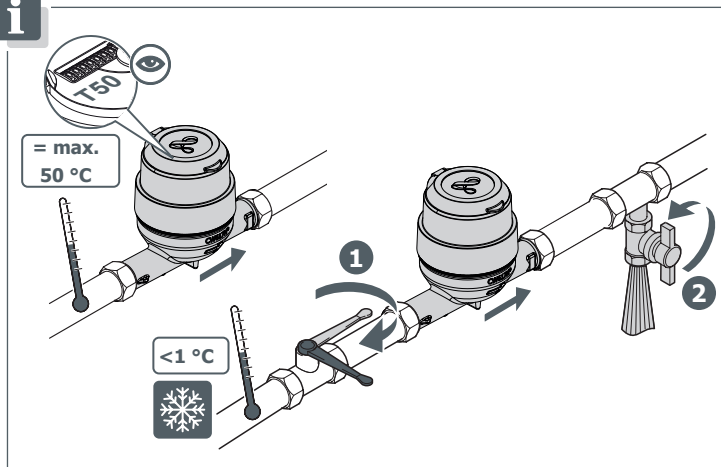




U0 / D0


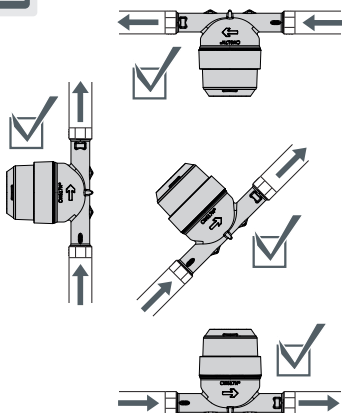

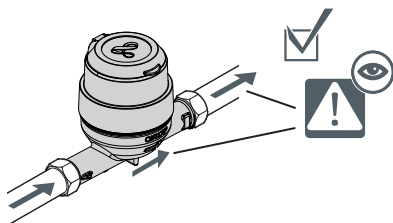






Teflon

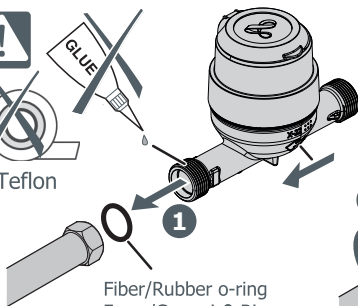

Fiber/Rubber o-ring
Faser/Gummi O-Ring
Joint fibre/caoutchouc
Anillo de fibra/de goma
Uszczelka gumowa/fibrowa

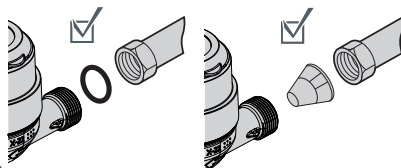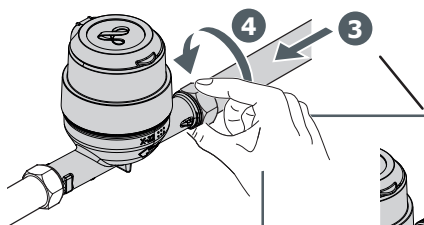




Optional





Extension fitting
Verlängerungsstück
Embout prolongateur
Pieza de extensión
Przedłużka

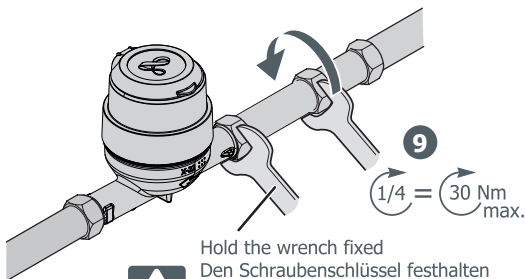


Hold the wrench fixed
Den Schraubenschlüssel festhalten
Maintenir la clé fixe
Mantener la llave fija
Trzymaj klucz nieruchomo



Manifold

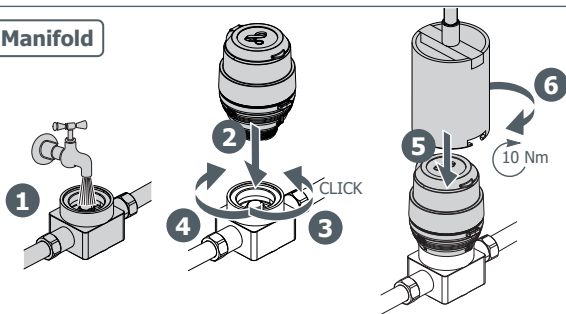

max. 0.1 g/l



max. $\varnothing$ 0.1 mm

