

ALTAIR V4 DN15/20

VOLUMETRIC METER



APPLICATION

ALTAIR V4 is a volumetric meter developed within the framework of the MID and European standards to meet field requirements. It is a particularly compact and robust meter, adapting to the most restrictive environments and compatible with varying water qualities.

Modular, ALTAIR V4 can be fitted at any time with an IZAR clip-on module converting it into a communicating meter, ready for mobile or fixed network (radio/wired) reading.

FEATURES

- DN15/20
- Q3=2.5m³/h (DN15) / Q3=4m³/h (DN20)
- MID approval up to R=800
- Starting flowrate at 0.4 l/h
- Composite & brass version
- High dynamic range
- Installation in any position
- Optional dual-zone filter

METROLOGICAL DATA

Nominal diameter	mm	15	15	15	15	15	20
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	2.5	2.5	2.5
Length*	L	mm	110	115	134	165	170
R standard*	Q ₃ /Q ₁		160	160	160	160	160
Starting flow rate		l/h	0.4	0.4	0.4	0.4	0.4
Minimum flow rate*	Q ₁	l/h	15.62	15.62	15.62	15.62	15.62
Transition flow rate*	Q ₂	l/h	25	25	25	25	25
Maximum flow rate	Q ₄	m ³ /h	3.125	3.125	3.125	3.125	3.125
Head loss at Q ₃		bar	0.59	0.59	0.59	0.59	0.59
Head loss at Q ₄		bar	0.92	0.92	0.92	0.92	0.92
Kvs (deltaP=Q ² /Kvs ²)			3.25	3.25	3.25	3.25	3.25

Nominal diameter	mm	20	20	20	20	20	20
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	4	4	4
Length*	L	mm	165	190	110	154	165
R standard*	Q ₃ /Q ₁		160	160	160	160	160
Starting flow rate		l/h	0.4	0.4	0.7	0.7	0.7
Minimum flow rate*	Q ₁	l/h	15.62	15.62	25	25	25
Transition flow rate*	Q ₂	l/h	25	25	40	40	40
Maximum flow rate	Q ₄	m ³ /h	3.125	3.125	5	5	5
Head loss at Q ₃		bar	0.59	0.59	0.55	0.5 ***	0.55 / 0.57**
Head loss at Q ₄		bar	0.92	0.92	0.85	-	0.85 / 0.89**
Kvs (deltaP=Q ² /Kvs ²)			3.25	3.25	5.41	-	5.41 / 5.30**

* Other values on request

** Composite version

*** Pressure loss at 2,500 l/h including dual check valve

Note: the use of a dual-zone filter does not affect the head loss performance

APPROVAL

DN 15 - 20

Approvals	MID: LNE - 6250 / Type A2 WATERMARK: WM040207 - NMI: P14/3/64
Standards	ISO 4064 EN 14154 OIML R49
Sanitary conformity*	ACS WRAS AoC DEU BELGAQUA KIWA DM 174 ASNZ-4020

* Dual-zone filter on request

REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains components with the following substances in a concentration of more than 0.1% weight by weight (w/w):


- Lead (CAS no.: 7439-92-1)

TEMPERATURES AND PRESSURE

DN 15 - 20

Water temperature	°C	0.1 ... +50
Ambient operating temperature	°C	+1 ... +55
Storage temperature	°C	-10 ... +55
Nominal pressure	PN	bar 16

DIMENSIONS

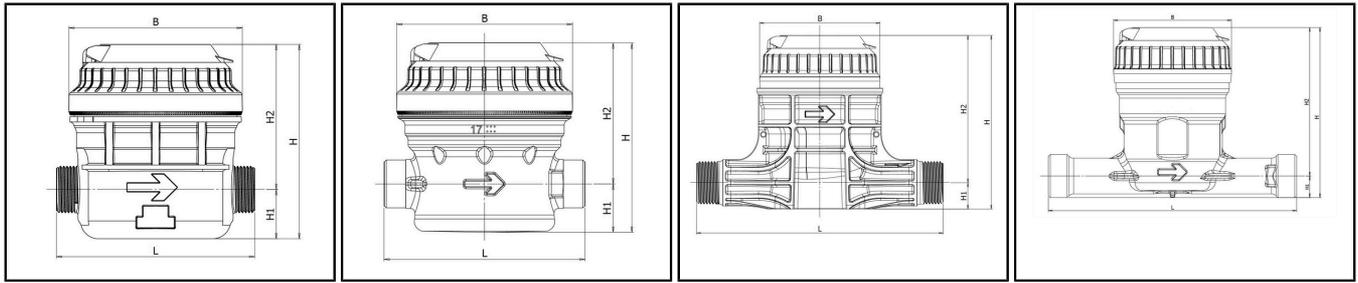

DN 15 - composite

DN 15 - brass

DN 20 - composite


DN 20 - brass

Nominal diameter		mm	15	15	15	15	15	20
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	2.5	2.5	2.5	2.5
Length*	L	mm	110	115	134	165	170	115
Housing			brass / composite	composite				
Width	B	mm	96.2	96.2	96.2	96.2	96.2	96.2
Height	H	mm	104.4 / 109	104.4 / 109	104.4 / 109	104.4 / 109	104.4 / 109	109
Height	H1	mm	26.7 / 28	26.7 / 28	26.7 / 28	26.7 / 28	26.7 / 28	28
Height	H2	mm	77.7 / 81	77.7 / 81	77.7 / 81	77.7 / 81	77.7 / 81	81
Thread connections		inch	3/4"	3/4" - 7/8"/3/4"	3/4"	3/4"	3/4"	1"
Weight		kg	0.9 / 0.5	1 / 0.5	1 / 0.6	1 / 0.6	1 / 0.6	0.5
Nominal diameter		mm	20	20	20	20	20	20
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	4	4	4	4
Length*	L	mm	165	190	110	154	165	190
Housing			brass / composite	brass	brass	brass	brass	brass / composite
Width	B	mm	96.2	90	90	90	90	90 / 96
Height	H	mm	104.4 / 109	104.1	131	133.1	131	131 / 134.8
Height	H1	mm	26.7 / 28	26.1	16.6	18.5	16.6	16.6 / 20.4
Height	H2	mm	77.7 / 81	78	114.4	114.6	114.4	114.4
Thread connections		inch	1"	1 1/8"	1"	1 1/28**	1"	1"
Weight		kg	1 / 0.6	1	1.2	1.24	1.4	1.4 / 0.7


* Other values on request.

** 1 1/28 BSW 14 TPI conform to AS 1722.2 Class B

PRECISION CURVE

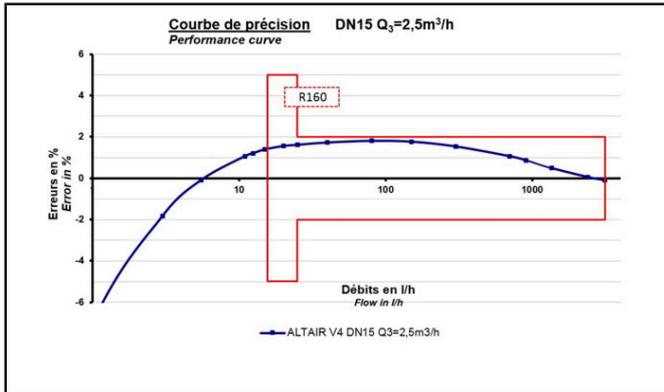

DN 15

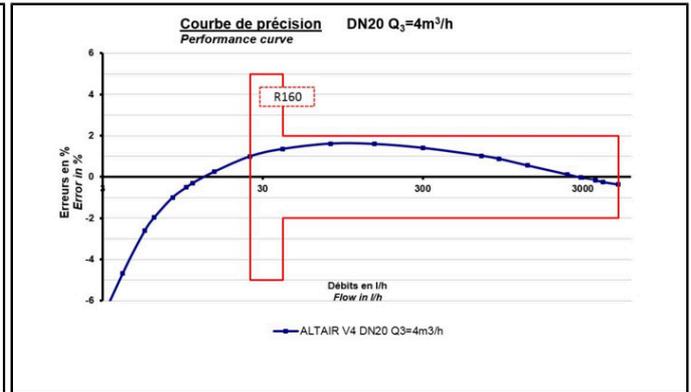

DN 20

This technology does not require straight length.

OPTIONS

- Non-return valve
- Pair of connectors
- Glass/metal register
- Patented dual-zone filter. More efficient, it replaces glove finger filters. This new filter considerably slows down the aging of the meter.

Economic Actor Information

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: metering-germany-info@diehl.com

Diehl Metering S.A.S.
Head Office
67 rue du Rhône
BP 10160
FR-68304 Saint-Louis Cedex
Phone: + 33 (0)3 89 69 54 00
Fax: + 33 (0)3 89 69 72 20
metering-France-info@diehl.com

International Sales
67 rue du Rhône
BP 10160
FR-68304 Saint-Louis Cedex
Phone: + 33 (0)3 89 69 54 21
Fax: + 33 (0)3 89 69 54 22
metering-France-export@diehl.com
www.diehl.com/metering

**EMPOWER A
SUSTAINABLE
FUTURE**