

ALTAIR V4 DN15/20

ROTARY PISTON METER



APPLICATION

ALTAIR V4 is a volumetric meter developed within the framework of the MID and European standards to meet field requirements. It is a particularly compact and robust meter, adapting to the most restrictive environments and compatible with varying water qualities.

Modular, ALTAIR V4 can be fitted at any time with an IZAR clip-on module converting it into a communicating meter, ready for mobile or fixed network (radio/wired) reading.

FEATURES

- DN 15/20
- $Q_3 = 2.5 \text{ m}^3/\text{h}$ (DN 15) / $Q_3 = 4 \text{ m}^3/\text{h}$ (DN 20)
- MID approval up to $R = 800$
- Starting flow rate at 0.4 l/h
- Composite & brass version
- High dynamic range
- Installation in any position

TECHNICAL DATA

Nominal diameter	DN	mm	15	15	15	15	15	20
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	2.5	2.5	2.5	2.5
Length*	L	mm	110	115	134	165	170	115
R standard*	Q ₃ /Q ₁		160	160	160	160	160	160
Starting flow rate		l/h	0.4	0.4	0.4	0.4	0.4	0.4
Minimum flow rate*	Q ₁	l/h	15.62	15.62	15.62	15.62	15.62	15.62
Transitional flow rate*	Q ₂	l/h	25	25	25	25	25	25
Overload flow rate	Q ₄	m ³ /h	3.125	3.125	3.125	3.125	3.125	3.125
Pressure loss at Q ₃		bar	0.59	0.59	0.59	0.59	0.59	0.59
Pressure loss at Q ₄		bar	0.92	0.92	0.92	0.92	0.92	0.92
Kvs (deltaP=Q ² /Kvs ²)			3.25	3.25	3.25	3.25	3.25	3.25

Nominal diameter	DN	mm	20	20	20	20	20
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	4	4	4
Length*	L	mm	165	190	110	165	190
R standard*	Q ₃ /Q ₁		160	160	160	160	160
Starting flow rate		l/h	0.4	0.4	0.7	0.7	0.7
Minimum flow rate*	Q ₁	l/h	15.62	15.62	25	25	25
Transitional flow rate*	Q ₂	l/h	25	25	40	40	40
Overload flow rate	Q ₄	m ³ /h	3.125	3.125	5	5	5
Pressure loss at Q ₃		bar	0.59	0.59	0.55	0.55	0.55 / 0.57**
Pressure loss at Q ₄		bar	0.92	0.92	0.85	0.85	0.85 / 0.89**
Kvs (deltaP=Q ² /Kvs ²)			3.25	3.25	5.41	5.41	5.41 / 5.30**

* Other values on request

** Composite version

APPROVAL

DN 15 - 20

Approvals	MID: LNE - 6250 / Type A2 WATERMARK: WM040207 - NMI: P14/3/64
Standards	ISO 4064 EN 14154 OIML R49
Sanitary conformity	ACS WRAS AOC DEU BELGAQUA KIWA DM 174 ASNZ-4020

REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains components with the following substances in a concentration of more than 0.1% weight by weight (w/w):


- Lead (CAS no.: 7439-92-1)

TEMPERATURES AND PRESSURE

DN 15 - 20

Water temperature	°C	0.1 ... +50
Ambient operating temperature	°C	+1 ... +55
Storage temperature	°C	-10 ... +55
Nominal pressure	PN	bar 16

DIMENSIONS

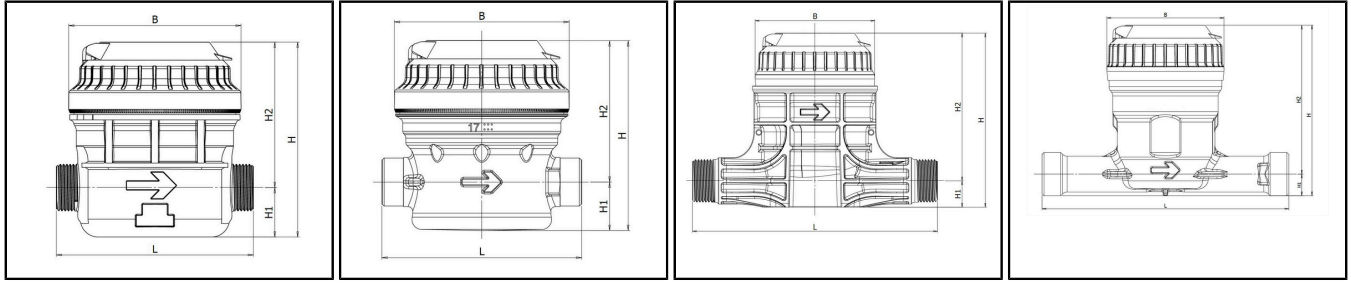

DN 15 - composite

DN 15 - brass


DN 20 - composite

DN 20 - brass


Nominal diameter	DN	mm	15	15	15	15	15	20
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	2.5	2.5	2.5	2.5
Length*	L	mm	110	115	134	165	170	115
Housing			brass / composite	brass / composite	brass / composite	brass / composite	brass / composite	composite
Width	B	mm	96.2	96.2	96.2	96.2	96.2	96.2
Height	H	mm	104.4 / 109	104.4 / 109	104.4 / 109	104.4 / 109	104.4 / 109	109
Height	H1	mm	26.7 / 28	26.7 / 28	26.7 / 28	26.7 / 28	26.7 / 28	28
Height	H2	mm	77.7 / 81	77.7 / 81	77.7 / 81	77.7 / 81	77.7 / 81	81
Thread connections		inch	3/4"	3/4" - 7/8" / 3/4"	3/4"	3/4"	3/4"	1"
Weight		kg	0.9 / 0.5	1 / 0.5	1 / 0.6	1 / 0.6	1 / 0.6	0.5
Nominal diameter	DN	mm	20	20	20	20	20	
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	4	4	4	
Length*	L	mm	165	190	110	165	190	
Housing			brass / composite	brass	brass	brass	brass / composite	
Width	B	mm	96.2	90	90	90	90 / 96	
Height	H	mm	104.4 / 109	104.1	131	131	131 / 134.8	
Height	H1	mm	26.7 / 28	26.1	16.6	16.6	16.6 / 20.4	
Height	H2	mm	77.7 / 81	78	114.4	114.4	114.4	
Thread connections		inch	1"	1"	1"	1"	G1B	
Weight		kg	1 / 0.6	1	1.2	1.4	1.4 / 0.7	

* Other values on request.

PRECISION CURVE

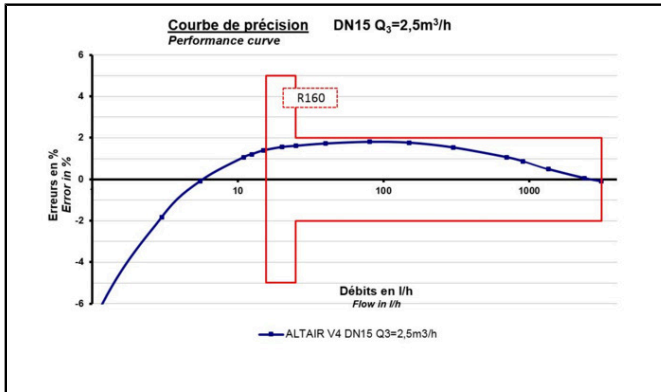

DN 15

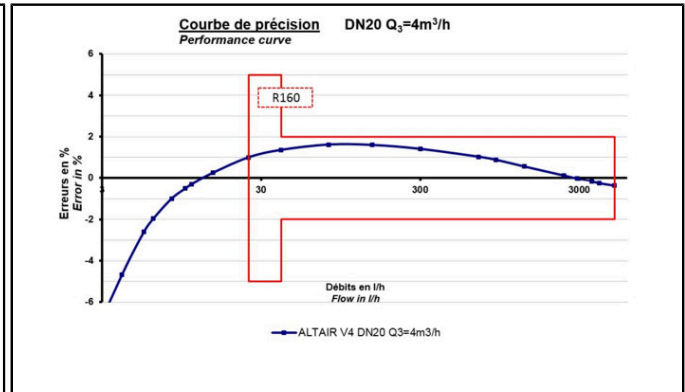

DN 20

This technology does not require straight length.

OPTIONS

- Non-return valve
- Pair of connectors
- Glass/metal register

Economic Actor Information

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: metering-germany-info@diehl.com

Diehl Metering GmbH
Donaustraße 120
90451 Nürnberg
Germany
Phone: +49 911 6424-0
metering-germany-info@diehl.com
www.diehl.com/metering

**EMPOWER A
SUSTAINABLE
FUTURE**