

AQUILA V5 DIN

Single-Jet Meter



APPLICATION

AQUILA V5 DIN is a bulk water meter designed for water network management and invoicing of substantial quantities of cold water.

It is characterised by its very high measuring dynamic, insensitivity to disturbance and easy maintenance. Its modular rotating flanges make it easy to install on any type of pipe, even when resizing is necessary.

Developed within the framework of the MID, AQUILA V5 DIN complies with the European regulations and holds sanitary conformity certificates.

AQUILA V5 DIN can be fitted at any time with an IZAR clip-on module converting it into a communicating meter ready for mobile reading (walk-by, drive-by, passive drive-by) or fixed network reading (radio/wired).

FEATURES

- DN50/80/100
- Q3=25m³/h (DN50) / Q3=63m³/h (DN80) / Q3=100m³/h (DN100)
- MID approval up to R=400 (Q3=25m³/h and Q3=63m³/h) and R=630 (Q3=100m³/h)
- Starting flow rate: 18 l/h (DN50) / 30 l/h (DN80) / 41 l/h (DN100)
- Cast-iron body

METROLOGICAL DATA

Nominal diameter	DN	mm	50	80	100
Length	L	mm	270	300	360
Nominal flow rate	Q ₃	m ³ /h	25	63	100
R standard*	Q ₃ /Q ₁		315	315	315
Starting flow rate		l/h	18	30	41
Minimum flow rate	Q ₁	l/h	79	200	317
Transition flow rate	Q ₂	l/h	127	320	508
Maximum flow rate	Q ₄	m ³ /h	31.25	78.75	125
Head loss at Q ₃		bar	0.480	0.518	0.578
Head loss at Q ₄		bar	0.753	0.782	0.962
kvs (deltaP=Q ² /Kvs ²)			36.01	89.05	127.44

* other values on request

APPROVAL

AQUILA V5 DIN


MID approval	LNE - 10913 C1 type
Standards	EN 14154 ISO 4064 OIML R49
Sanitary conformity	ACS PZH

TEMPERATURE AND PRESSURE


AQUILA V5 DIN

Water temperature	°C	+0.1 ... +50
Ambient operating temperature	°C	+1 ... +55
Storage temperature	°C	-10 ... +55
Nominal pressure	PN	bar 16 (additional PN20 for DN50)

DIMENSIONS

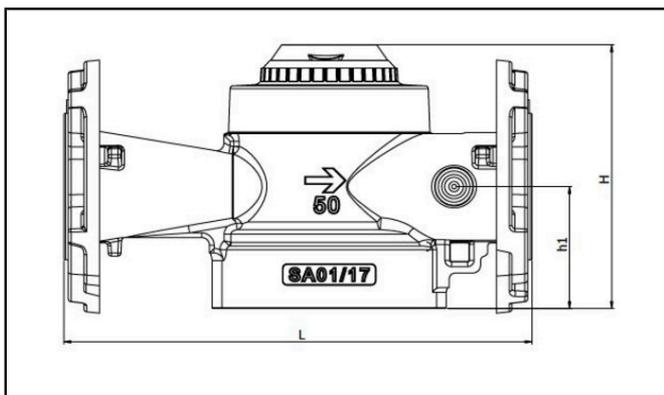

Side view

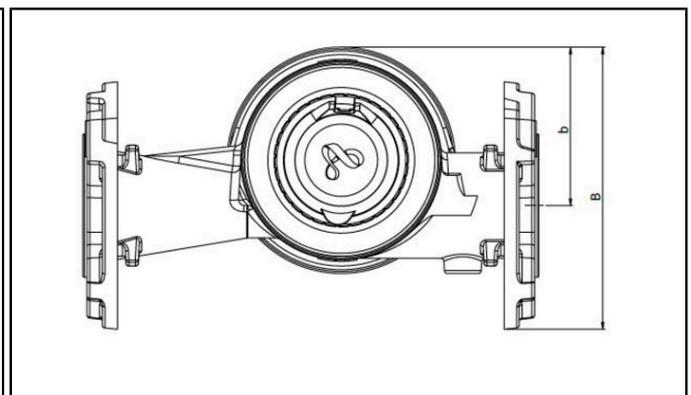


Top view

Nominal diameter	DN	mm	50	80	100
Length	L	mm	270	300	360
Width at the axis	b	mm	105	150	150
Width	B	mm	187	250	260
Height	H	mm	171	204	204
Height	h1	mm	80	98	98
Flange diameter		mm	164	200	220
Housing			cast-iron	cast-iron	cast-iron
Weight (meter + flanges PN16)		kg	8.2	14.4	16.2


AVAILABLE FLANGES

Nominal diameter	DN	mm	50	80	100
Length	L	mm	270	300	360
Flanges DN50 PN16			•	-	-
Flanges DN50 PN20			•	-	-
Flanges DN80 PN16			-	•	-
Flanges DN100 PN16			-	-	•
Number of screw holes		pcs	4	8	8

PRECISION CURVE - DN50/80

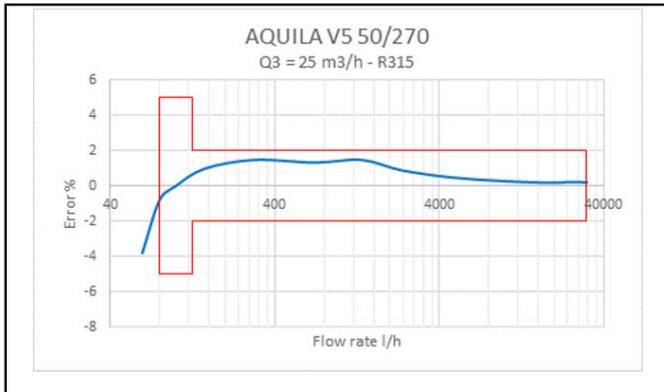


DN50-270

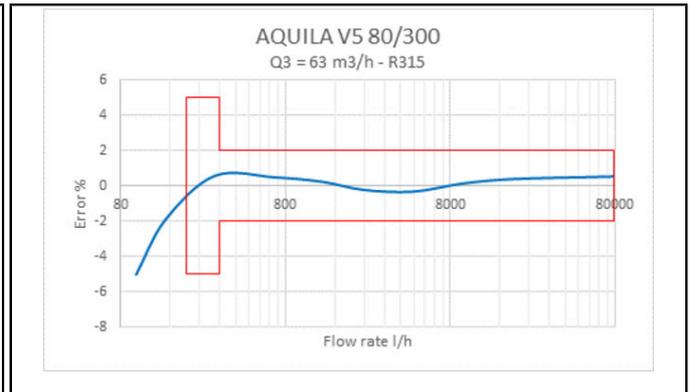

DN80-300

This technology doesn't require straight length.

PRECISION CURVE - DN100

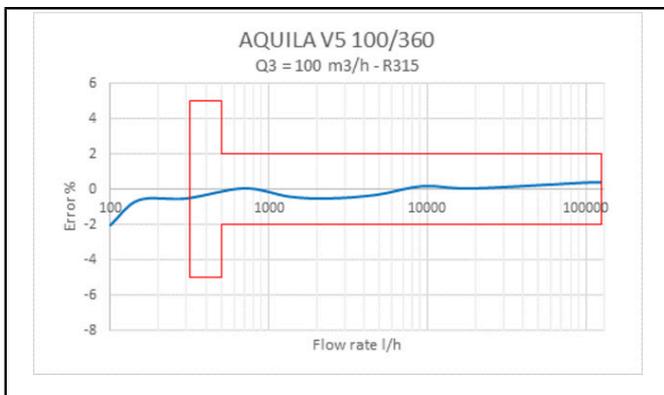

DN100-360

This technology does not require straight length.

OPTIONS

- Different types of flanges

Economic Actor Information

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: metering-germany-info@diehl.com

Diehl Metering GesmbH
Hainburger Straße 33
A-1030 Vienna
Austria
Phone: +43 (0)1 716 70-0
Fax: +43 (0)1 716 70-12
metering-austria-info@diehl.com
www.diehl.com/metering

**EMPOWER A
SUSTAINABLE
FUTURE**