

ARIES IS

SINGLE-JET METER



APPLICATION

ARIES IS is a single jet water meter specifically designed for submetering market. It is characterised by its accurate metering capability, its ruggedness and versatility. Its integrated radio module enables remote reading of the index and alarms of the meter in mobile mode (walk-by) or fixed network.

Developed within the framework of the MID, ARIES IS complies with the European regulations and holds sanitary conformity certificates.

FEATURES

- DN 15
- Q3=2.5 m³/h
- MID approval up to R=125H and R=63V
- Starting flow rate: 6 l/h
- Brass body
- Cold and hot water
- IZAR integrated 868 MHz and 434 MHz radio, PRIOS protocol
- Battery lifetime up to 10 years
- IP54: not suitable for wet environment

METROLOGICAL DATA

Nominal diameter	DN	mm	15	15
Length	L	mm	80	110
Nominal flowrate	Q ₃	m ³ /h	2.5	2.5
Body			brass	brass
R standard*	Q ₃ /Q ₁		80H-40V	125H-63V
Starting flowrate horizontal		l/h	12	6
Minimum flowrate horizontal	Q ₁	l/h	31	20
Transition flowrate horizontal	Q ₂	l/h	50	32
Minimum flowrate vertical	Q ₁	l/h	61.5	39.7
Transition flowrate vertical	Q ₂	l/h	100	63.5
Maximum flowrate	Q ₄	m ³ /h	3.125	3.125
Head loss at Q ₃		bar	0.56	0.59
Head loss at Q ₄		bar	0.88	0.93
Kvs (deltaP=Q ² /Kvs ²)			3.34	3.25

* other values on request - H=horizontal installation position / V=vertical installation position

APPROVAL

ARIES IS	
MID approval	LNE-30014 B2 type
Sanitary conformity	ACS WRAS PZH
Standards	ISO 4064 EN 14154 OIML R49

REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains articles with the following substances in a concentration of more than 0.1% weight by weight (w/w):

- Lead (CAS no.: 7439-92-1)

TEMPERATURE AND PRESSURE

ARIES IS	
Water temperature	°C +0.1 ... +50 +0.1 ... +90
Operating ambient temperature	°C +1 ... +55
Storage temperature	°C -10 ... +55
Nominal pressure	bar 16
Degree of protection	IP 54


TECHNICAL DATA IZAR INTEGRATED RADIO

ARIES IS	
Communication protocol	PRIOS
Frequency	MHz 868.95 (R3 mode) and 434.47 (R3 mode)**
Sending interval	Every 32 seconds
Standards	EN 300 220, CE, RED directive, EN 13757-3/-4
Transmission power	mW 16
Transmission mode	Unidirectional
Radio range	Up to 500 m depending on the environment
Power supply	3 V lithium battery
Typical battery lifetime	Up to 10 years*
Integrated functions	Current index Historical index value Remaining battery lifetime
Alarms management	Leak detection Meter stopped Overflow Underflow Backflow

ARIES IS - SINGLE-JET METER


*Under standard conditions of use and temperature. Theoretical lifetime, not guaranteed.
**434 MHz available for DN15/110 Q3=2.5. Other variants on demand.

DIMENSIONS

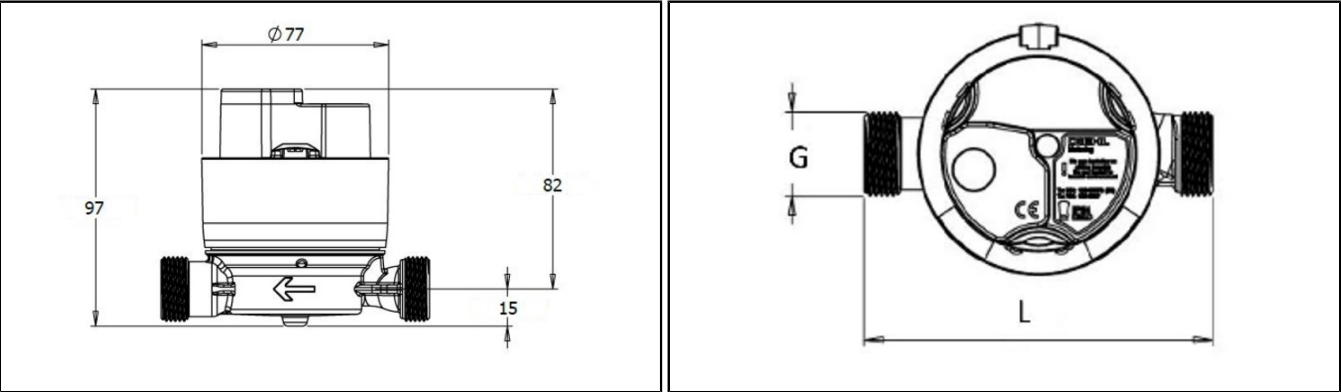

Nominal diameter	DN	mm	15	15
Length	L	mm	80	110
Nominal flowrate	Q ₃	m ³ /h	2.5	2.5
Body			brass	brass
Width		mm	77	77
Height		mm	97	97
Thread connections	G	inch	3/4"	3/4"
Weight		kg	0.37	0.45

PRECISION CURVE

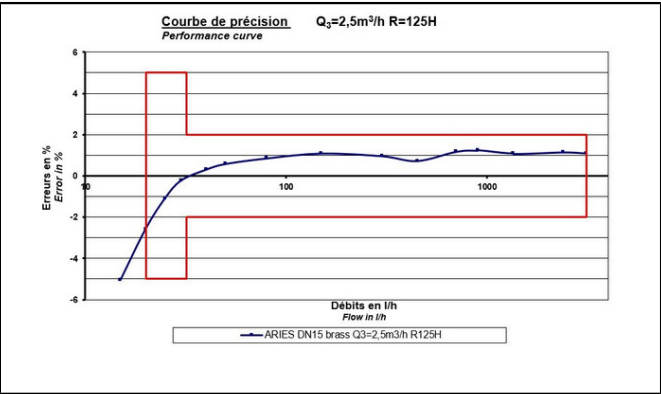

DN15 brass - Q3=2.5 R=125H

This technology doesn't require straight length.

OPTIONS

- Tamper-proof ring
- Non-return valve that entirely fits into the body

Economic Actor Information

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: metering-germany-info@diehl.com

Diehl Metering S.A.S.
Head Office
67 rue du Rhône
BP 10160
FR-68304 Saint-Louis Cedex
Phone: + 33 (0)3 89 69 54 00
Fax: + 33 (0)3 89 69 72 20
metering-France-info@diehl.com

International Sales
67 rue du Rhône
BP 10160
FR-68304 Saint-Louis Cedex
Phone: + 33 (0)3 89 69 54 21
Fax: + 33 (0)3 89 69 54 22
metering-France-export@diehl.com
www.diehl.com/metering

**EMPOWER A
SUSTAINABLE
FUTURE**