

# AURIGA DN15/20

## SINGLE-JET METER



### APPLICATION

AURIGA DN15/20 is a single-jet water meter designed for measuring cold water in main metering market. Robust, it is particularly suitable for demanding installation conditions and sediment laden waters.

Developed within the framework of the MID, AURIGA complies with the European regulations and holds sanitary conformity certificates.

Modular, AURIGA can be fitted at any time with an IZAR clip-on module converting it into a communicating meter ready for mobile reading (walk-by, drive-by, passive drive-by) or fixed network reading (radio/wired).

### FEATURES

- DN15/20
- Q3=2.5m<sup>3</sup>/h (DN15) / Q3=4m<sup>3</sup>/h (DN20)
- MID / OIML approvals up to R=160H & R=63V
- Starting flow rate: 3l/h (DN15) / 8 l/h (DN20)
- Brass or composite body
- High resistance to demanding water conditions (sand, iron)
- Compact and modular

## METROLOGICAL DATA

| Nominal diameter                               | DN                             | mm                | 15       | 15       | 15        | 15       | 20       |
|------------------------------------------------|--------------------------------|-------------------|----------|----------|-----------|----------|----------|
| Length                                         | L                              | mm                | 110      | 115      | 115       | 165/170  | 190      |
| R standard*                                    | Q <sub>3</sub> /Q <sub>1</sub> |                   | 160H-63V | 160H-63V | 160H-63V  | 160H-63V | 160H-63V |
| Body                                           |                                |                   | brass    | brass    | composite | brass    | brass    |
| Nominal flowrate                               | Q <sub>3</sub>                 | m <sup>3</sup> /h | 2.5      | 2.5      | 2.5       | 2.5      | 4        |
| Starting flowrate horizontal                   |                                | l/h               | 3        | 3        | 3         | 3        | 8        |
| Minimum flowrate horizontal                    | Q <sub>1</sub>                 | l/h               | 15.625   | 15.625   | 15.625    | 15.625   | 25       |
| Transition flowrate horizontal                 | Q <sub>2</sub>                 | l/h               | 25       | 25       | 25        | 25       | 40       |
| Minimum flowrate vertical                      | Q <sub>1</sub>                 | l/h               | 39.7     | 39.7     | 39.7      | 39.7     | 63.5     |
| Transition flowrate vertical                   | Q <sub>2</sub>                 | l/h               | 63.5     | 63.5     | 63.5      | 63.5     | 101.6    |
| Maximum flowrate                               | Q <sub>4</sub>                 | m <sup>3</sup> /h | 3.125    | 3.125    | 3.125     | 3.125    | 5        |
| Head loss at Q <sub>3</sub>                    |                                | bar               | 0.62     | 0.62     | 0.62      | 0.62     | 0.58     |
| Head loss at Q <sub>4</sub>                    |                                | bar               | 0.98     | 0.98     | 0.98      | 0.96     | 0.91     |
| kvs (deltaP=Q <sup>2</sup> /Kvs <sup>2</sup> ) |                                |                   | 3.15     | 3.15     | 3.15      | 3.15     | 5.25     |

\*Other values on request - H=horizontal installation position / V=vertical installation position

## APPROVAL

## AURIGA DN15/20

|                     |                                             |
|---------------------|---------------------------------------------|
| MID approval        | LNE-30014   Type B2                         |
| Standards           | ISO 4064-1-2014   OIML R49-1-2013           |
| Sanitary conformity | ACS   AoC DEU   Belgaqua   KIWA   OTH   PZH |

## REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains articles with the following substances in a concentration of more than 0.1% weight by weight (w/w):

- Lead (CAS no.: 7439-92-1)

## TEMPERATURE AND PRESSURE


## AURIGA DN15/20

|                               |     |              |
|-------------------------------|-----|--------------|
| Water temperature             | °C  | +0.1 ... +50 |
| Ambient operating temperature | °C  | +1 ... +55   |
| Storage temperature           | °C  | -10 ... +55  |
| Nominal pressure              | bar | 16           |

## OPTIONS

- Pair of connectors
- Non-return valve


## DIMENSIONS

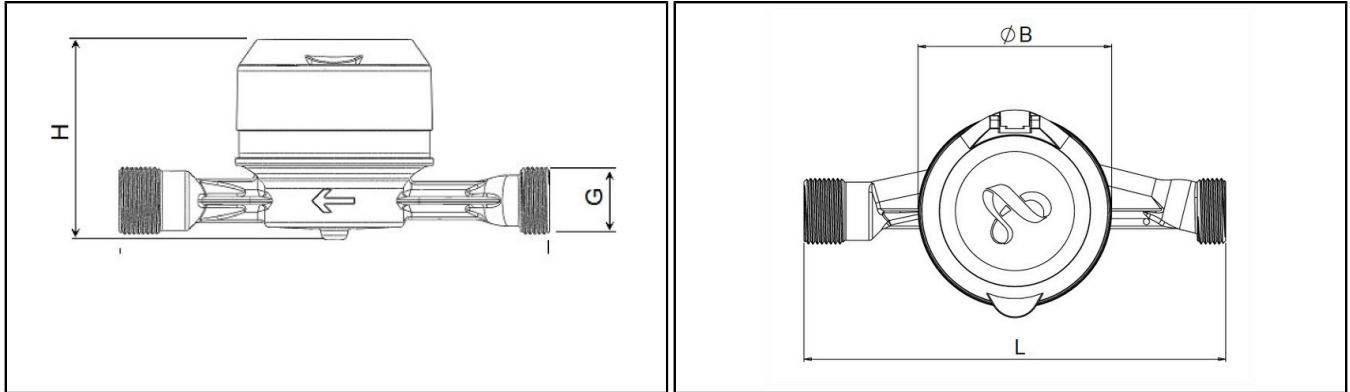


| Nominal diameter   | DN                             | mm   | 15       | 15        | 15        | 15       | 20       |
|--------------------|--------------------------------|------|----------|-----------|-----------|----------|----------|
| Length             | L                              | mm   | 110      | 115       | 115       | 165/170  | 190      |
| R standard*        | Q <sub>3</sub> /Q <sub>1</sub> |      | 160H-63V | 160H-63V  | 160H-63V  | 160H-63V | 160H-63V |
| Body               |                                |      | brass    | brass     | composite | brass    | brass    |
| Width              | B                              | mm   | 73       | 73        | 73        | 73       | 90       |
| Height             | H                              | mm   | 79       | 79        | 79        | 75       | 80       |
| Thread connections | G                              | inch | 3/4"     | 3/4" 7/8" | 3/4" 7/8" | 3/4"     | 1"       |
| Weight             |                                | kg   | 0.49     | 0.5       | 0.25      | 0.53     | 0.73     |

\*Other values on request

PRECISION CURVES - DN15

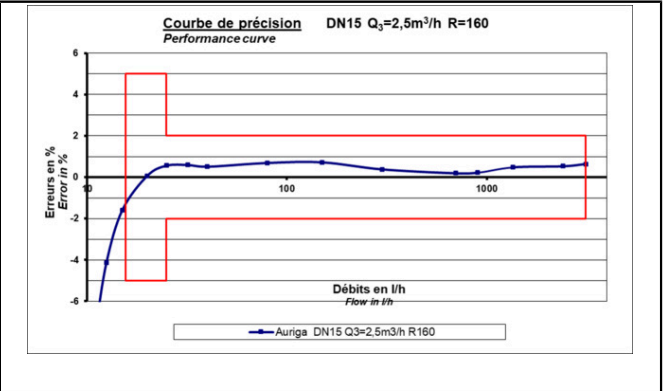


DN15 - brass

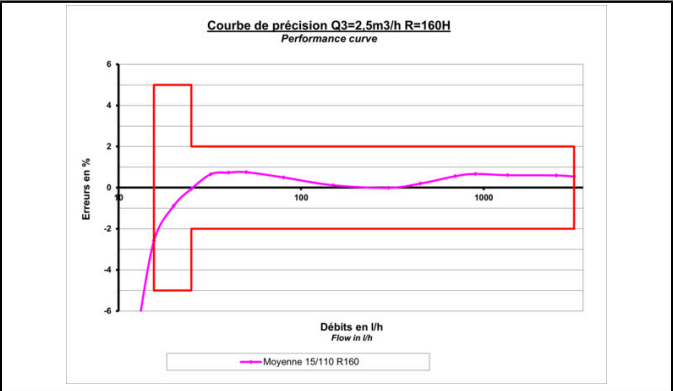

DN15 - composite

This technology does not require straight length.

PRECISION CURVES - DN20

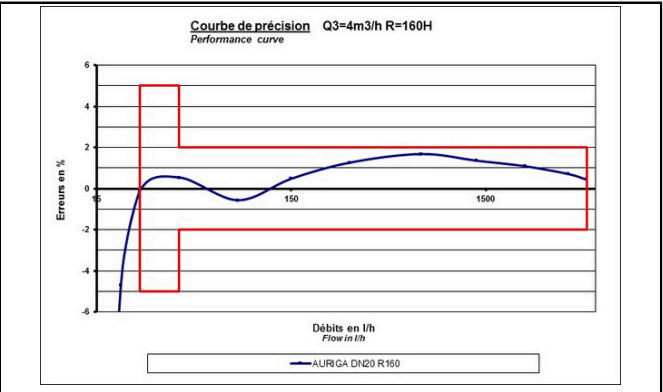

DN20 - brass

This technology does not require straight length.

### **Economic Actor Information**

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: [metering-germany-info@diehl.com](mailto:metering-germany-info@diehl.com)

Diehl Metering GmbH  
Donaustraße 120  
90451 Nürnberg  
Germany  
Phone: +49 911 6424-0  
[metering-germany-info@diehl.com](mailto:metering-germany-info@diehl.com)  
[www.diehl.com/metering](http://www.diehl.com/metering)

**EMPOWER A  
SUSTAINABLE  
FUTURE**