

IZAR RDC BATTERY

RADIO RECEIVER



APPLICATION

IZAR RDC BATTERY is a concentrator specifically designed for fixed network meters reading.

IZAR RDC BATTERY reads every communicating multi-energy meters (water, thermal energy, gas, electricity...) and sensors equipped with the IZAR radio technology. It then transmits the data to a data storage server at preset times. IZAR RDC BATTERY can manage up to 4,000 meters with the data directly processed using IZAR@NET 2 or IZAR PLUS PORTAL software.

IZAR RDC BATTERY is fully autonomous in energy thanks to a battery pack easily replaceable on site. An external connector enables the use of another source of energy, such as a solar one. Moreover, equipped with a SD memory card, it can operate in "data logger" mode for a more accurate analysis of the data (consumption profiles, leakage detection...).

FEATURES

- Available in 868 MHz or 434 MHz
- Local or remote configuration
- Interval of radio reading from 5 min. to 24 hours
- Up to 4,000 meters stored
- Data transmission to FTP or SFTP server
- Configurable rate of data transmission via 2G/3G
- Battery pack included, replaceable on site without data loss
- Battery lifetime up to 10 years
- "Radio data logger" function

OPERATING PRINCIPLE

IZAR RDC BATTERY receives radio frames according to the EN 13757 standard and the OMS specification (Open Metering System), regardless of the type of fluid measured (water, thermal energy, gas, electricity, temperature, humidity...). Intelligent data filter options can be activated in order to precisely target the reading on defined meters, in particular by fluid type or manufacturer. The data transfer to an FTP or SFTP storage server is performed automatically through programming, either at regular intervals or at fixed date/time. The Diehl Metering software solutions IZAR@NET 2 or IZAR PLUS PORTAL enable the processing and exploitation of this data.

TECHNICAL DATA


IZAR RDC BATTERY	
Housing	Light grey with removable compartment
Frequency	MHz 868.95 (T1/C1 mode) or 434.475 (T1 mode only)
Communication protocols	OMS wMBUS [EN 13757-3/-4] PRIOS
Type of fluid measured	Multi-energy (water, thermal energy, electricity, temperatures, humidity...)
Antenna	Internal and external (SMA connectors)
Connectivity	Bluetooth®
Network	2G/3G
Power supply	V(DC) Field-replaceable lithium battery pack as well as external connector (12 ... 24V DC)
Battery lifetime	Up to 10 years*
Meters management	Up to 4,000 meters
Recording capacity	250,000 frames
Events	Concentrator displacement Temperature Housing opening Low battery
Data logging	Possible with recording on SD card
Configuration	Locally or remotely with a dedicated software (Windows)

* Depending on the setting and in standard conditions of use and temperatures. Theoretical lifetime, not guaranteed.

AMBIENT CONDITIONS

IZAR RDC BATTERY	
Operating temperatures	°C -20 ... +70
Storage temperatures	°C -20 ... +70
Ambient humidity	% 10 ... 90
Protection class	IP65 - outdoors installation possible

DIMENSIONS

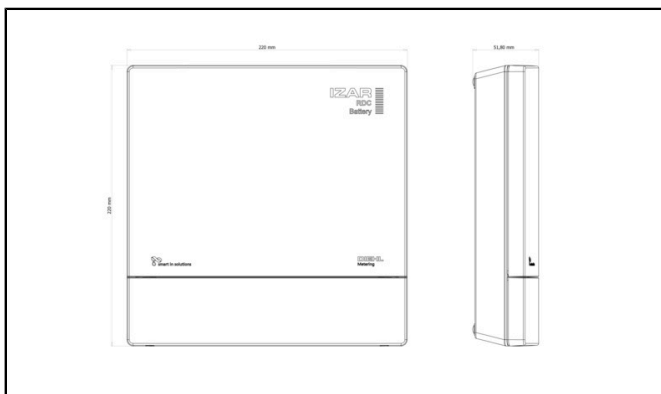

IZAR RDC BATTERY	
Length	mm 220
Width	mm 220
Height	H mm 51.8

Economic Actor Information

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: metering-germany-info@diehl.com

Diehl Metering S.A.S.
Head Office
67 rue du Rhône
BP 10160
FR-68304 Saint-Louis Cedex
Phone: + 33 (0)3 89 69 54 00
Fax: + 33 (0)3 89 69 72 20
metering-France-info@diehl.com

International Sales
67 rue du Rhône
BP 10160
FR-68304 Saint-Louis Cedex
Phone: + 33 (0)3 89 69 54 21
Fax: + 33 (0)3 89 69 54 22
metering-France-export@diehl.com
www.diehl.com/metering

**EMPOWER A
SUSTAINABLE
FUTURE**