

# IZAR RDC PREMIUM 2 (PHASED-OUT)

RADIO | RECEIVER



## APPLICATION

The IZAR Radio Data Concentrator Premium 2 is the most powerful data concentrator of Diehl Metering's RDC product family. The fixed network receivers are already in the 4th generation and combine longtime experience with numerous devices in global operation. The IZAR RDC Premium 2 can reach highest reading performance in regards to reading range, data timeliness and data granularity under harsh environmental conditions. Therefore an outstanding cost efficiency with future-compliance is guaranteed. Our gateway features 2way2receiver communication which enables you to access the stored data and configuration parameters with an online feeling from any place.

## FEATURES

- Capacity for up to 50,000 devices
- Extreme extended reception range with mioty® for Metering
- Intelligent telegram filtering
- Highest meter data availability with On-Demand Reading
- Brown-Out Detection with an energy buffer allowing to store last data
- 2way2receiver communication allowing access to gateway from any place
- High On-Board-Security and communication protected against unauthorized access
- LAN and WAN 4G (LTE) for data transmission
- IP 65 as well for LAN while using our LAN connector accessory

## PRINCIPLE OF OPERATION

The IZAR RDC Premium 2 receives radio telegrams according to EN13757 and the Open Metering System Specification (OMS-S) independent of the measured medium. These are saved on the basis of a filter function (e.g. according to medium or manufacturer). The collected and processed data are exported in flexibly settable intervals or time points in a fully automatic and secure way to IZAR@NET or other systems which can upload the files for further processing. All this happens automatically upon schedules configured in every gateway.

## GENERAL

IZAR RDC Premium 2	
Capacity	Up to 50,000 devices with radio
Housing	Light grey metal housing, lockable
Supported media	Independent of media
Antenna	2 N connections
Data granularity	Individual adjustable (5 minutes - 24 hours)
Range of reception	Up to 11 km outdoors, dependent on used antenna and location


## TECHNICAL DATA

IZAR RDC Premium 2	
Versions	868 MHz and 434 MHz (OMS, wMBUS (EN 13757), PRIOS, RealData, Long Range Radio (R4 / R4+), extreme extended radio range mioty® for Metering)
Interfaces	LAN, 2G, 3G, 4G
Power supply	100 V ... 240 V AC Line voltage and PoE+ (802.3at)
Power connector	CEE 7/7 (power plug adapters type B (USA) and type G (UK) available as accessories)
Typical power consumption	W < 15 (max. 25)

## AMBIENT CONDITIONS

IZAR RDC Premium 2	
Operating temperature	°C -20 ... +55
Storage temperature	°C -20 ... +70
Protection class	IP 65 (as well for LAN with our IP 65 LAN connector accessory)
Humidity	% 10 ... 85 (non-condensing)

## DIMENSIONS

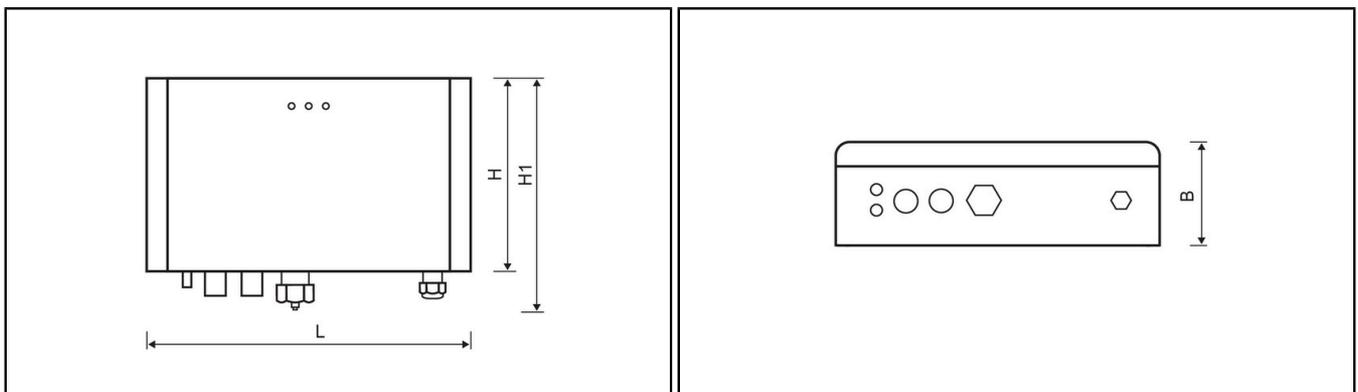

IZAR RDC Premium 2			
Length	L	mm	280
Width	B	mm	90
Height	H	mm	170
Height	H1	mm	205
Weight		kg	3.8

## **Economic Actor Information**

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: [metering-germany-info@diehl.com](mailto:metering-germany-info@diehl.com)

Diehl Metering GmbH  
Donaustraße 120  
90451 Nürnberg  
Germany  
Phone: +49 911 6424-0  
[metering-germany-info@diehl.com](mailto:metering-germany-info@diehl.com)  
[www.diehl.com/metering](http://www.diehl.com/metering)

**EMPOWER A  
SUSTAINABLE  
FUTURE**