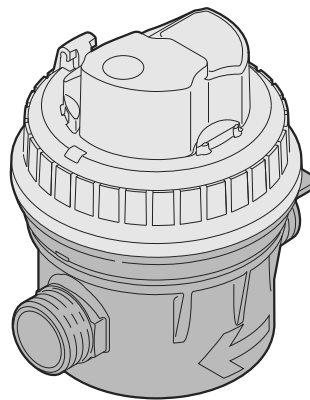
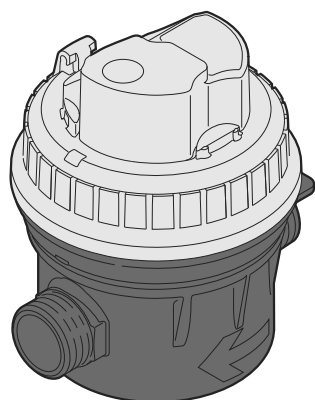


Maximum 3 months
3 mois maximum
Maximal 3 Monate
Máximo 3 meses
Maksymalnie 3 miesiące



max.
+55°C

min.
-10°C

max.
+50°C

min.
+5°C


IP54

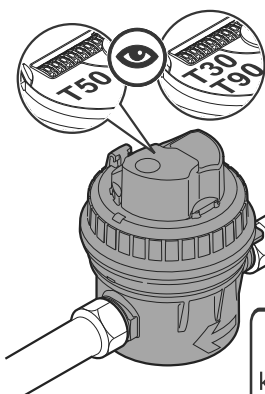



90 °C max.




50 °C max.

cold water - hot water
eau froide - eau chaude
kaltes Wasser - heisses Wasser
agua fría - agua caliente
woda zimna - woda ciepła

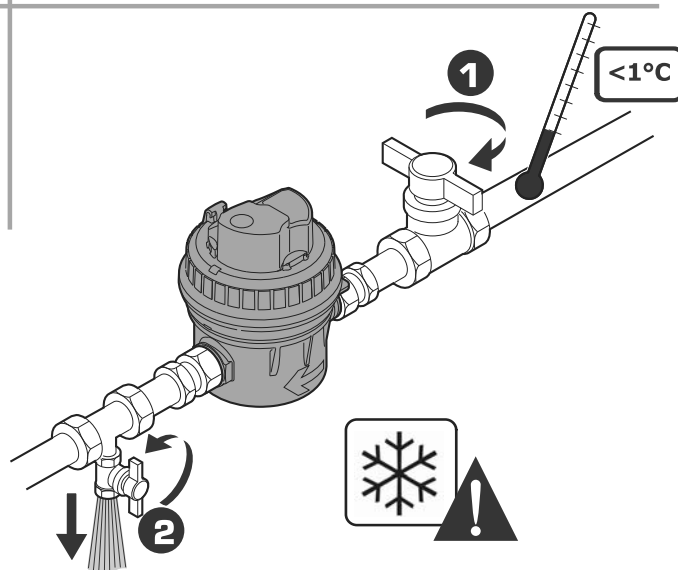


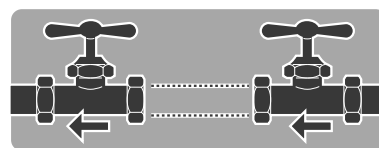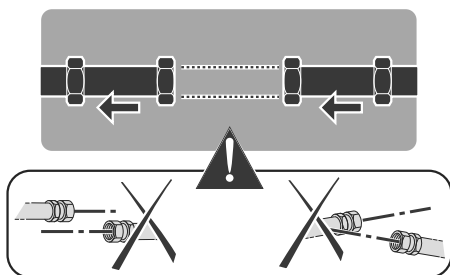






U0 / D0

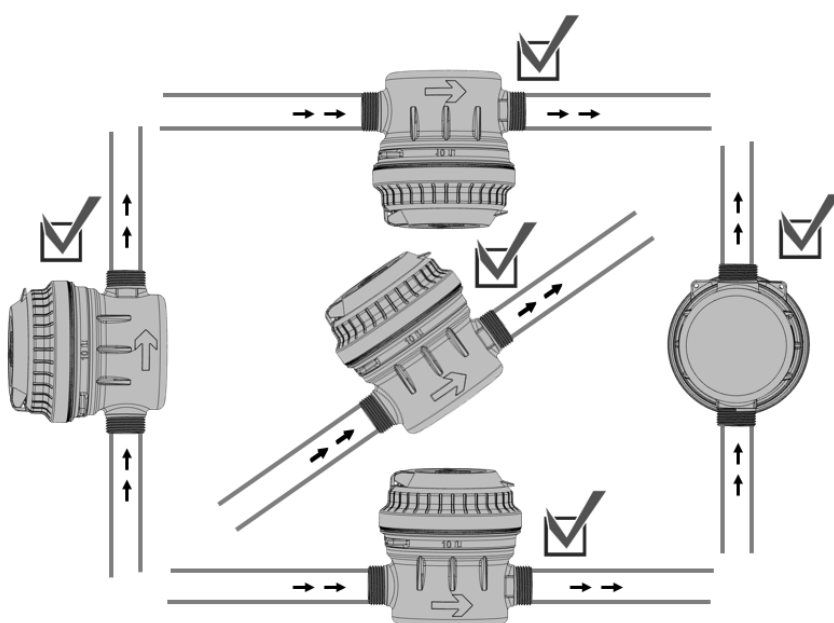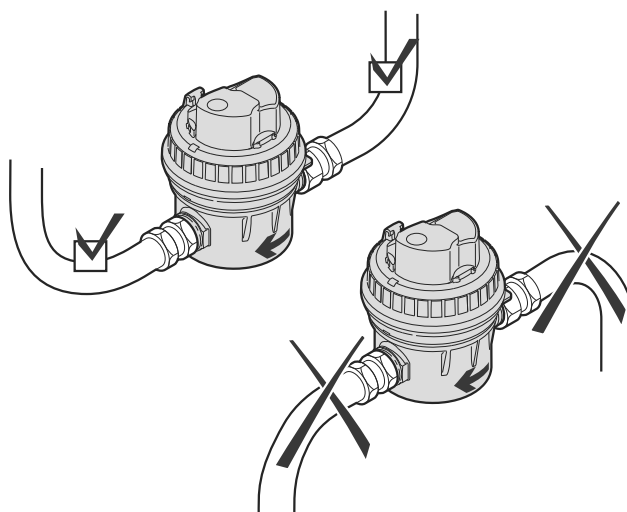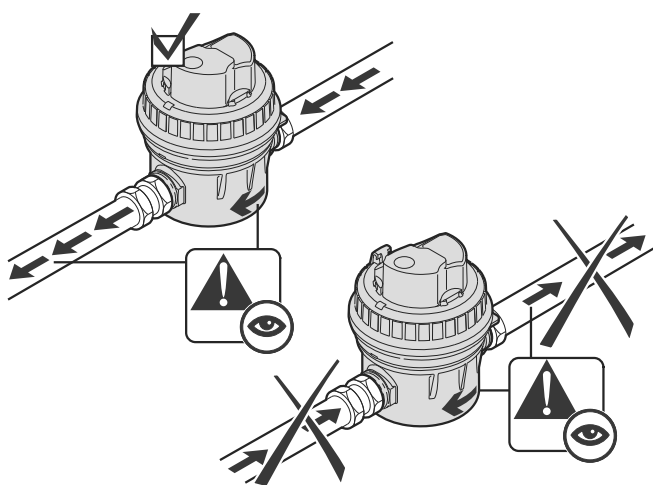


ALTAIR V4 IS

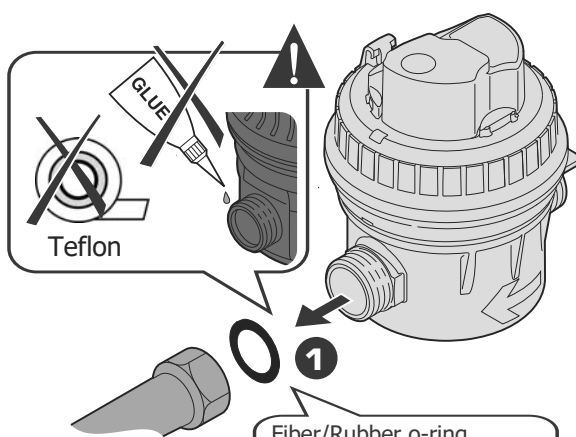

Fiber/Rubber o-ring
Joint fibre/caoutchouc
Faser/Gummi o-Ring
Anillo de fibra/de goma
Uszczelka gumowa/fibrowa

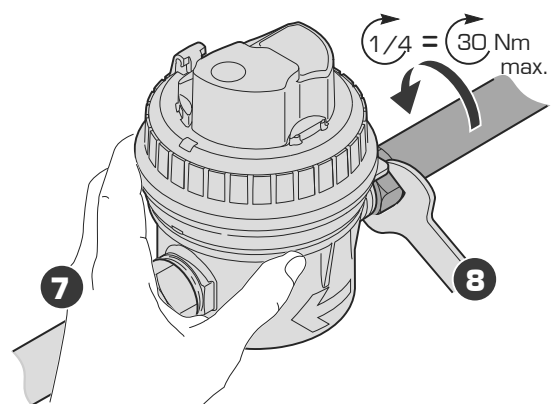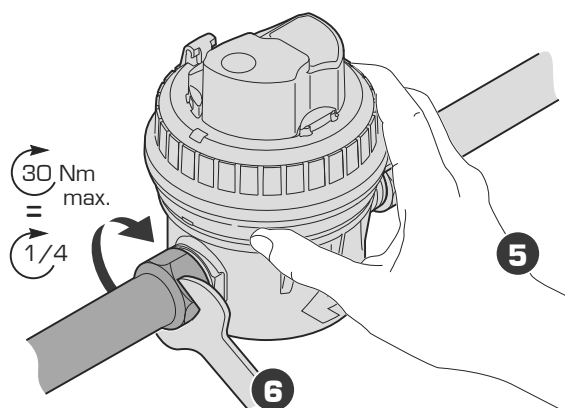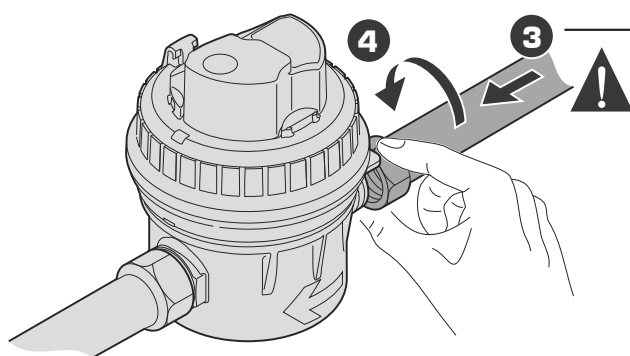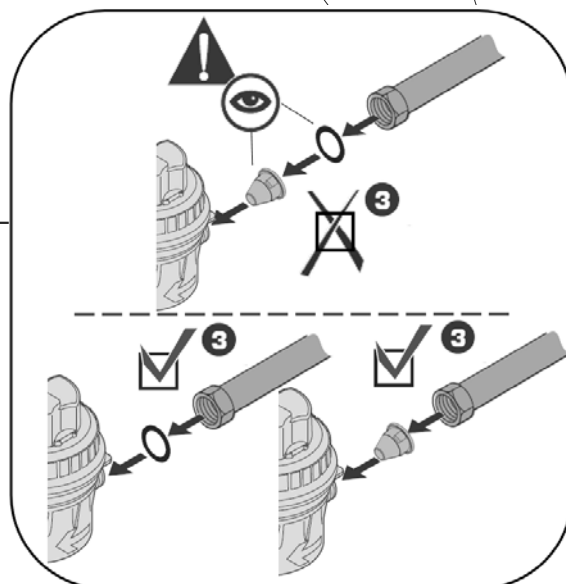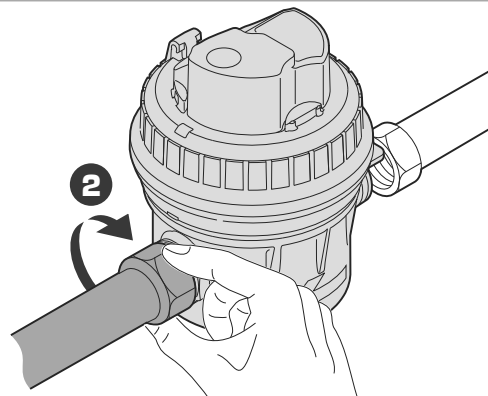

16 Bar max.

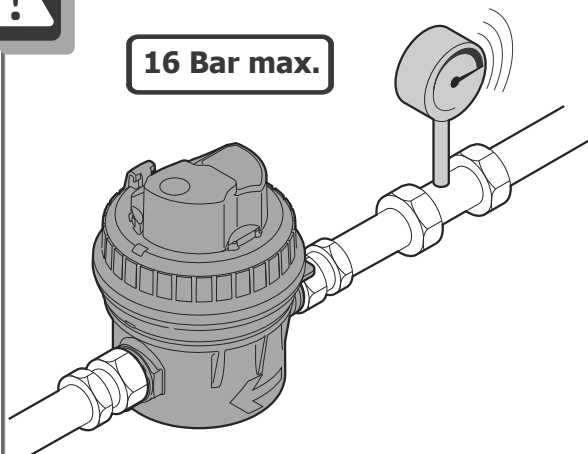

Q4 max.

