

RAY FS WS 453/455

FLOW SENSOR | MECHANICAL

DIEHL
Metering



APPLICATION

Volume measuring device to measure thermal quantities

FEATURES

- ▶ Possibility of remote transmission of quantities of flow
- ▶ For easy reading the complete head part with totalizer can be turned to any position
- ▶ Easily removeable reed-switch
- ▶ The pulse transmitter is fitted with a 100 Ω , 1/4 W series resistor (cable length 3 m) - can be supplied without series resistor on request
- ▶ Contact load (without series resistor) max. 24 V AC/DC (protective low voltage) 0.2 A
- ▶ Outstanding continuance of accuracy even with extreme charges because of vane bearing bearing of ring sapphire and carbide metal
- ▶ Considerably extended measuring range towards small flows compared to documentation of metrological class
- ▶ As a safeguard against magnetic influences, a sealable antimagnetic screen is fitted on the meter
- ▶ Approved according MID in class 2 and 3
- ▶ Completely dry-running

RAY FS WS 453/455

FLOW SENSOR | MECHANICAL

GENERAL

RAY FS WS 453/455			
Application	Heating		
Mounting position	Horizontal		
Medium temperature range	°C	15 ... 105	
Ambient temperature	°C	5 ... 55	
Ambient class	E1 + M1		
Nominal pressure	PN	bar	16 ¹
Protection class	IP 54		
Approval	MID (DE-15-MI004-PTB010)		

¹special version on request

REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains components with the following substances in a concentration of more than 0.1% weight by weight (w/w):
- Lead (CAS no.: 7439-92-1)

TECHNICAL DATA

Nominal diameter	DN	mm	50	65	80	100	150
Nominal flow rate	q _p	m ³ /h	15	25	40	60	150
Maximum flow rate (short-term)	q _s	m ³ /h	30	30	50	75	187.5
Minimum flow rate	q _i	l/h	600	1000	1600	2400	6000
Starting flow rate		l/h	60	60	90	90	1000
Pressure loss at q _p	Δp	bar	0.06	0.14	0.09	0.07	0.09
Pulse value reed switch ¹		l/pulse	10 / 100	10 / 100	10 / 100	10 / 100	10 / 100
Metrological class ²	q _p / q _i		25:1	25:1	25:1	25:1	25:1
Flow rate at 0.1 bar pressure loss		m ³ /h	19	21	42	70	160

¹other pulse values on request

²other q_p / q_i on request


DISPLAY RANGE

Nominal diameter	DN	mm	50	65	80	100	150
0.5 l ... 999,999 m ³			•	•	•	•	
5.0 l ... 9,999,999 m ³							•

RAY FS WS 453/455


FLOW SENSOR | MECHANICAL

DIMENSIONS

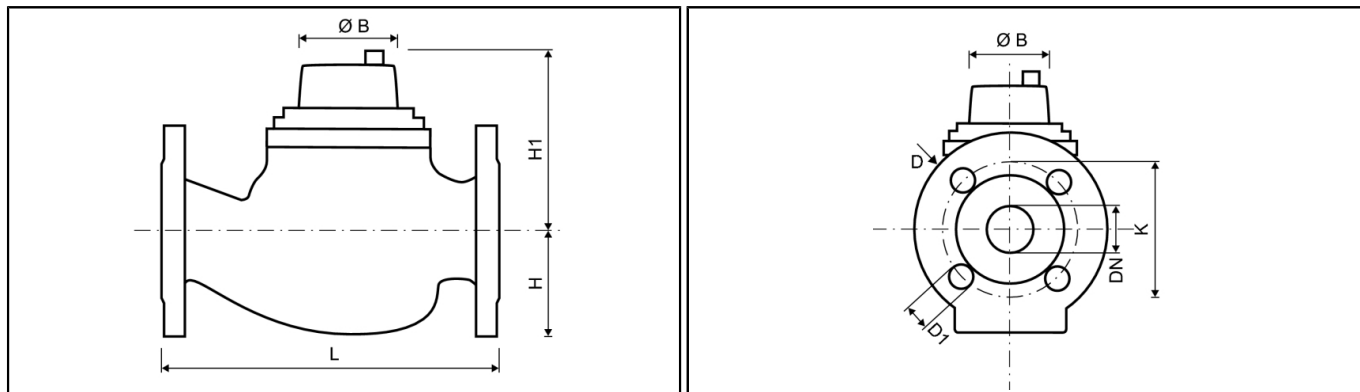


Nominal diameter	DN	mm	50	65	80	100	150
Overall length (DIN 19625)	L	mm	270	300	300	360	500
Overall length (DIN ISO 4064)	L	mm	300	300	350	350	500
Flange diameter	D	mm	165	185	200	220	285
Hole circle diameter	K	mm	125	145	160	180	240
Number of screwholes		pcs	4	4	8 / 4	8	8
Screw hole diameter	D1	mm	18	18	18	18	23
Height	H	mm	84	97	102	113	155
Height (without counter extension)	H1	mm	155	155	190	200	400
Height (with counter extension)	H1	mm	195	195	230	240	440
Diameter	Ø B	mm	165	185	200	220	285
Weight		kg	14.2	18	24	28	79.5

PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH

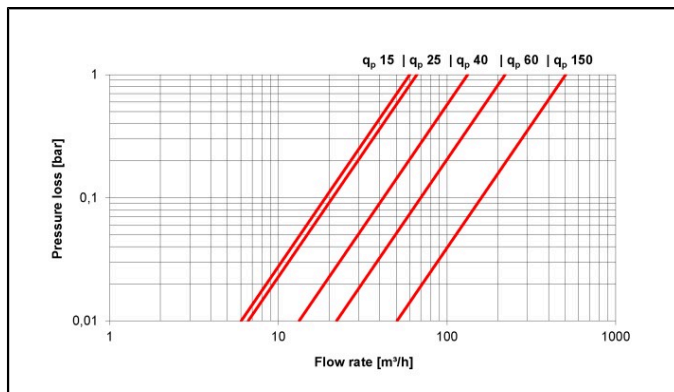

Pressure loss graph

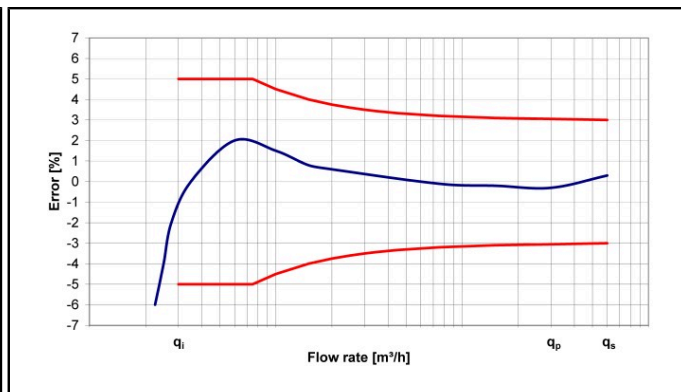

Typical error graph