

SHARKY 775

COMPACT ENERGY METER | ULTRASONIC



APPLICATION

The ultrasonic compact energy meter can be used for measuring the energy consumption in heating / cooling application for billing purposes.

FEATURES

- Approval for ultrasonic meter with dynamic range up to 1:250 (qi:qp) in class 2 (depends on meter size), standard 1:100
- Improved power consumption --> longer battery lifetime
- Approved according MID in class 2 and 3 and PTB K 7.2 (cooling)
- High long term stability, verified at independent AGFW test
- Insensitive against dirt
- Versatile possibility of power supply
- Optional with integrated radio Open Metering Standard (868 or 434 MHz) Generation 3 Profile A or Generation 4 Profile B
- Individual remote reading (AMR) with add on modules Plug & Play
- Extensive readable data memory
- 3 communication interfaces (e. g. M-Bus + M-Bus + Radio)
- Significantly improved radio performance
- Leakage Detection

BASIC FEATURES

		SHARKY	
Application		Heating - cooling - heating/with cooling tariff (cooling tariff at $-dT$ and $t_{flow} < 20$ °C)	
Approval		MID (DE-10-MI004-PTB013) and PTB K7.2 for cooling (DE-16-M-PTB-0001)	
Environmental class		Class C	
Ambient class		Class E2 + M2	
Ambient operating temperature	°C	+5 ... +55 (<35 °C have a positive lifetime effect)	
Ambient storage temperature	°C	-25 ... +60 (>35 °C max. 4 weeks)	
Communication		3 communication interfaces (e. g. M-Bus + M-Bus + Int. Radio; 2 primary addresses, 1 secondary address)	
Integrated Radio		Optional	
Frequency band		868 or 434 MHz	
Type of radio telegram		Open Metering Standard (OMS), Generation 3 Profile A or Generation 4 Profile B	
Transmission data updating		Online - no time delay between value measurement and data transmission	
Data transmission		Unidirectional	
Sending interval		With A-cell: 180 s (up to 10.5 years lifetime); with D-cell: ~12 s (up to 16 years lifetime); with mains unit: ~12 s; depending on length of telegram (duty cycle)	
Test possibilities		Via display, optical test pulses, test output or via NOWA software	

BASIC FEATURES - CALCULATOR

		SHARKY	
Protection class		IP 54	
Battery supply		3.6 VDC A-cell up to 10.5 years lifetime (depending on configuration); 3.6 VDC D-cell up to 16 years lifetime	
Mains supply		24 VAC (50 - 60 Hz); 230 VAC (50 - 60 Hz)	
Temperature sensor type		Pt 100 or Pt 500 with 2-wire leads; Ø 5.2 / 6 mm or direct sensor	
Cable length of temperature sensor		Pt 100: 1.9 m; Pt 500: 1.9 / 2.9 / 4.9 / 9.9 m	
Absolute temperature range calculator	Θ °C	1 ... 180	
Measuring cycle - flow		With mains supply: 1/8 s; with A-cell battery: 1 s; with D-cell battery: 1 s	
Measuring cycle - temperature sensor	T s	With mains supply: 2 s; with A-cell battery: 16 s; with D-cell battery: 4 s	
Starting temperature difference	$\Delta\Theta$ K	0.125	
Min. temperature difference	$\Delta\Theta_{min}$ K	3	
Max. temperature difference	$\Delta\Theta_{max}$ K	120 / 175 (heating) 50 (cooling)	
Interfaces standard		Optical ZVEI interface 300 ... 2400 Baud (auto Baud detected)	
Interfaces optional		2 Slots for modules with M-Bus, L-Bus, LON works, LoRa, MOD Bus, RS232, RS485, pulse output, pulse input, combined pulse in-/output or analogue output	
Extensive readable data memory		Periodical log ¹ ; 3 history logs; event memory (Flash/E ² Prom - non-volatile)	

¹ Programmable storage interval (daily, weekly, monthly, ...)

BASIC FEATURES - FLOW SENSOR

		SHARKY
Mounting position flow sensor		Any position, calming sections not necessary, inlet installation / outlet installation / in field programmable
Protection class flow sensor		Heating IP 54 Heating with cooling tariff / cooling acc. IP 65
Material of the flow sensor body		Brass or spheroidal cast iron (only q_p 15 up to q_p 100 m ³ /h)
Temperature range heating	°C	5 ... 105 / 130 / 150 (depends on meter size and material)
Temperature range cooling	°C	5 ... 50
Temperature range heating/cooling	°C	5 ... 105

DISPLAY

		SHARKY
Display indication		LCD, 8-digit
Units		MWh - kWh - GJ - Gcal - MBtu - gal - GPM - °C - °F - m ³ - m ³ /h
Total values		99,999,999 - 9,999,999.9 - 999,999.99 - 99,999.999
Values displayed		Energy - Power - Volume - Flow rate - Temperature and more

INTERFACES

		SHARKY
Optical		ZVEI interface, for communication and testing, M-Bus protocol
M-Bus		Configurable telegram, according to EN13757-3, two wires with non polarity, auto baud detect (300 and 2400 baud), one M-Bus load
Wireless M-Bus		Open Metering Standard (OMS), Generation 3 Profile A or Generation 4 Profile B; frequency band 868 or 434 MHz
L-Bus		Adapter for external radio module, configurable telegram, according to EN13757-3, data reading and parametrization are via two wires with polarity reversal protection
Modbus RTU		Polarity independent, Voltage 12 - 24 V AC/DC, <150 mW; protocol - Modbus RTU, Channel - EIA-485 (galvanic isolated), Baud rate 1200 ... 115200. The default communication: 9600 bps Baud rate, 8N1 data format, Modbus Slave ID - 1
LonWorks		Polarity independent; Voltage 12 - 24 V AC/DC, <150 mW; Channel - TP/FT-10, Baud rate - 78 kbits per second, Data format - Differential Manchester Coding
LoRa		Five different telegrams can be selected via OTC App (AppStore Android). Up to 11 years lifetime with own battery and the modern ECO Mode. Transmission interval varies with the connection quality.
NB-IoT*		Compatible in Slot 1 with internal antenna, with external D-Cell battery, 13+1 years battery lifetime with daily upload of 24 hourly values. Configurable with NFC connection via OTC App (AppStore Android).
RS232		Serial interface for communication with external devices, a special data cable is required, M-Bus protocol, 300 and 2400 baud
RS485		Serial interface for communication with external devices, power supply with 12 V ± 5 V, M-Bus protocol, 2400 baud
Pulse output		Module with 2 Open Collector pulse outputs (potential-free), output 1: 4 Hz (pulse width 125 ms), pulse or static conditions (e.g. errors), output 2: 200 Hz (pulse width ≥ 5 ms), configurable via IZAR@MOBILE 2 software
Pulse input		Module with 2 pulse inputs, max. 20 Hz, configurable via IZAR@MOBILE 2 software, data can be transferred remotely
Combined pulse in-/output		Module with 2 pulse inputs and 1 pulse output, configurable via IZAR@MOBILE 2 software, needed for leak detection
Analogue output		Module for 4 ... 20 mA with 2 programmable passive outputs, programmable value in case of error

* Starting with August 1, 2025, only devices with firmware F04.006 or newer may be combined with NB-IoT modules with firmware 1.4.0 or newer, in order to ensure compliance with the essential requirements according to art. 3(3) d and art. 3(3) e of Directive 2014/53/EU ("RED Cybersecurity"). The firmware version can be read out with the OTC app.

TECHNICAL DATA FLOW SENSOR

Nominal flow rate	q _p	m ³ /h	0.6	0.6	0.6	1.5	1.5	1.5	1.5
Nominal diameter	DN	mm	15	20	20	15	15	20	20
Overall length	L	mm	110	130	190	110	165	130	190
Starting flow rate		l/h	1	1	1	2.5	2.5	2.5	2.5
Minimum flow rate (DR 1:250)	q _i	l/h	-	-	-	6	6	6	6
Minimum flow rate (DR 1:100)	q _i	l/h	6	6	6	15	15	15	15
Maximum flow rate	q _s	m ³ /h	1.2	1.2	1.2	3	3	3	3
Overload flow rate		m ³ /h	2.5	2.5	2.5	4.6	4.6	4.6	4.6
Operating pressure	PN	bar	16/25	16/25	16/25	16/25	16/25	16/25	16/25
Pressure loss at q _p	Δp	mbar	95	85	85	130	130	115	115
Temp. range heating - brass body		°C	5 ... 130	5 ... 130	5 ... 130	5 ... 130	5 ... 130	5 ... 130	5 ... 130
Temp. range heating - spheroidal cast iron body		°C	-	-	-	-	-	-	-
kv value		m ³ /h	1.95	2.06	2.06	4.16	4.16	4.42	4.42

Nominal flow rate	q _p	m ³ /h	2.5	2.5	3.5	3.5	3.5	3.5	3.5
Nominal diameter	DN	mm	20	20	25	25	25	32	32
Overall length	L	mm	130	190	135	150	260	150	260
Starting flow rate		l/h	4	4	10	10	10	10	10
Minimum flow rate (DR 1:250)	q _i	l/h	10	10	-	-	-	-	-
Minimum flow rate (DR 1:100)	q _i	l/h	25	25	35	35	35	35	35
Maximum flow rate	q _s	m ³ /h	5	5	7	7	7	7	7
Overload flow rate		m ³ /h	6.7	6.7	18.4	18.4	18.4	18.4	18.4
Operating pressure	PN	bar	16/25	16/25	16/25	16/25	16/25	16/25	16/25
Pressure loss at q _p	Δp	mbar	110	110	65	65	65	65	65
Temp. range heating - brass body		°C	5 ... 130	5 ... 130	5 ... 150	5 ... 150	5 ... 150	5 ... 150	5 ... 150
Temp. range heating - spheroidal cast iron body		°C	-	-	-	-	-	-	-
kv value		m ³ /h	7.54	7.54	13.73	13.73	13.73	13.73	13.73


Nominal flow rate	q _p	m ³ /h	6	6	6	6	6	6	10
Nominal diameter	DN	mm	25	25	25	32	32	40	40
Overall length	L	mm	135	150	260	150	260	150	200
Starting flow rate		l/h	10	10	10	10	10	10	20
Minimum flow rate (DR 1:250)	q _i	l/h	24	24	24	24	24	-	40 ¹
Minimum flow rate (DR 1:100)	q _i	l/h	60	60	60	60	60	60	100
Maximum flow rate	q _s	m ³ /h	12	12	12	12	12	12	20
Overload flow rate		m ³ /h	18.4	18.4	18.4	18.4	18.4	18.4	24
Operating pressure	PN	bar	16/25	16/25	16/25	16/25	16/25	16/25	16/25
Pressure loss at q _p	Δp	mbar	190	190	190	190	190	190	140
Temp. range heating - brass body		°C	5 ... 150	5 ... 150	5 ... 150	5 ... 150	5 ... 150	5 ... 150	5 ... 150
Temp. range heating - spheroidal cast iron body		°C	-	-	-	-	-	-	-
kv value		m ³ /h	13.76	13.76	13.76	13.76	13.76	13.76	26.73

SHARKY 775 - COMPACT ENERGY METER | ULTRASONIC

Nominal flow rate	q_p	m^3/h	10	15	25	40	60	100
Nominal diameter	DN	mm	40	50	65	80	100	100
Overall length	L	mm	300	270	300	300	360	360
Starting flow rate		l/h	20	40	50	80	120	120
Minimum flow rate (DR 1:250)	q_i	l/h	40 ¹	60 ¹	100 ¹	160	240 ¹	240 ¹
Minimum flow rate (DR 1:100)	q_i	l/h	100	150	250	400	600	1000
Maximum flow rate	q_s	m^3/h	20	30	50	80	120	120
Overload flow rate		m^3/h	24	36	60	90	132	132
Operating pressure	PN	bar	16/25	16/25	16/25	16/25	16/25	16/25
Pressure loss at q_p	Δp	mbar	140	165	75	80	75	210
Temp. range heating - brass body		°C	5 ... 150	5 ... 150	5 ... 150	5 ... 150	5 ... 150	5 ... 150
Temp. range heating - spheroidal cast iron body		°C	-	5 ... 105	5 ... 105	5 ... 105	5 ... 105	5 ... 105
kv value		m^3/h	26.73	36.93	91.29	141.42	219.09	218.22

¹ Only for horizontal installation

DIMENSIONS THREAD VERSION

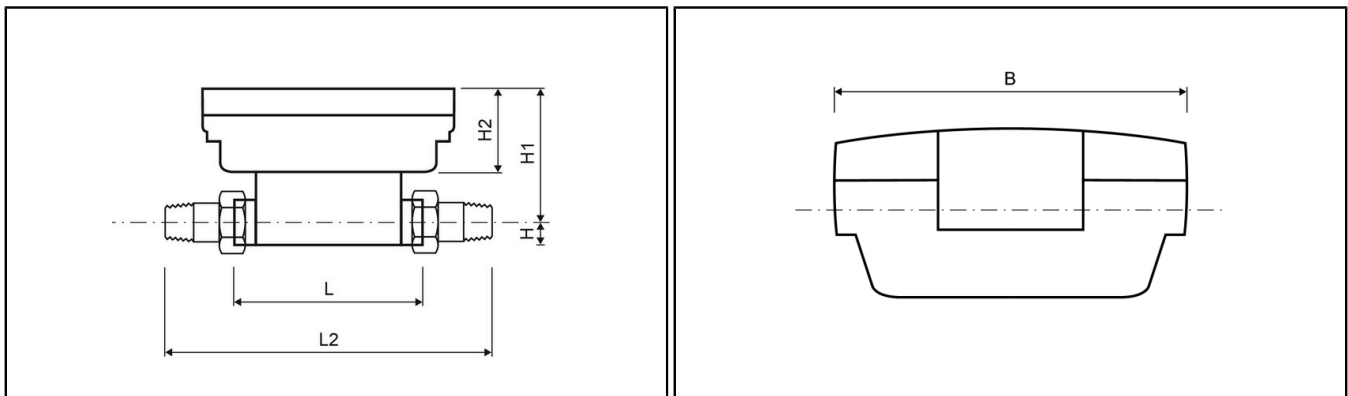

Nominal flow rate	q_p	m^3/h	0.6	0.6	0.6	1.5	1.5	1.5	1.5
Nominal diameter	DN	mm	15	20	20	15	15	20	20
Overall length	L	mm	110	130	190	110	165	130	190
Overall length with coupling	L2	mm	190	230	290	190	245	230	290
Length of calculator	L1	mm	150	150	150	150	150	150	150
Height	H	mm	14.5	18	18	14.5	14.5	18	18
Height	H1	mm	82	84	84	82	82	84	84
Height of calculator	H2	mm	54	54	54	54	54	54	54
Width of calculator	B	mm	100	100	100	100	100	100	100
Connection thread on meter		Inch	G $\frac{3}{4}$ B	G1B	G1B	G $\frac{3}{4}$ B	G $\frac{3}{4}$ B	G1B	G1B
Connection thread of coupling		Inch	R $\frac{1}{2}$	R $\frac{3}{4}$	R $\frac{3}{4}$	R $\frac{1}{2}$	R $\frac{1}{2}$	R $\frac{3}{4}$	R $\frac{3}{4}$
Weight ¹		kg	0.76	0.85	0.96	0.76	0.85	0.85	0.96

SHARKY 775 - COMPACT ENERGY METER | ULTRASONIC


Nominal flow rate	q _p	m ³ /h	2.5	2.5	3.5	3.5	3.5	3.5	3.5
Nominal diameter	DN	mm	20	20	25	25	25	32	32
Overall length	L	mm	130	190	135	150	260	150	260
Overall length with coupling	L2	mm	230	290	255	270	380	270	380
Length of calculator	L1	mm	150	150	150	150	150	150	150
Height	H	mm	18	18	23	23	23	23	23
Height	H1	mm	84	84	88.5	88.5	88.5	88.5	88.5
Height of calculator	H2	mm	54	54	54	54	54	54	54
Width of calculator	B	mm	100	100	100	100	100	100	100
Connection thread on meter		Inch	G1B	G1B	G1¼B	G1¼B	G1¼B	G1½B	G1½B
Connection thread of coupling		Inch	R¾	R¾	R1	R1	R1	R1¼	R1¼
Weight ¹		kg	0.85	0.96	1.03	1.08	1.5	1.23	1.5

Nominal flow rate	q _p	m ³ /h	6	6	6	6	6	6	10
Nominal diameter	DN	mm	25	25	25	32	32	40	40
Overall length	L	mm	135	150	260	150	260	150	200
Overall length with coupling	L2	mm	255	270	380	270	380	-	340
Length of calculator	L1	mm	150	150	150	150	150	150	150
Height	H	mm	23	23	23	23	23	23	33
Height	H1	mm	88.5	88.5	88.5	88.5	88.5	88.5	94
Height of calculator	H2	mm	54	54	54	54	54	54	54
Width of calculator	B	mm	100	100	100	100	100	100	100
Connection thread on meter		Inch	G1¼B	G1¼B	G1¼B	G1½B	G1½B	G2B	G2B
Connection thread of coupling		Inch	R1	R1	R1	R1¼	R1¼	R1½	R1½
Weight ¹		kg	1.03	1.08	1.5	1.23	1.5	1.52	2.9

Nominal flow rate	q _p	m ³ /h	10	15	25	40	60	100
Nominal diameter	DN	mm	40	50	65	80	100	100
Overall length	L	mm	300	270	300	300	360	360
Overall length with coupling	L2	mm	440	-	-	-	-	-
Length of calculator	L1	mm	150	-	-	-	-	-
Height	H	mm	33	-	-	-	-	-
Height	H1	mm	94	-	-	-	-	-
Height of calculator	H2	mm	54	-	-	-	-	-
Width of calculator	B	mm	100	-	-	-	-	-
Connection thread on meter		Inch	G2B	-	-	-	-	-
Connection thread of coupling		Inch	R1½	-	-	-	-	-
Weight ¹		kg	3.1	-	-	-	-	-

¹ Meter with A-cell, without modules, 1.4 m cable length, 1.9 m cable length of temperature sensor Ø 5.2 mm

DIMENSIONS FLANGE VERSION

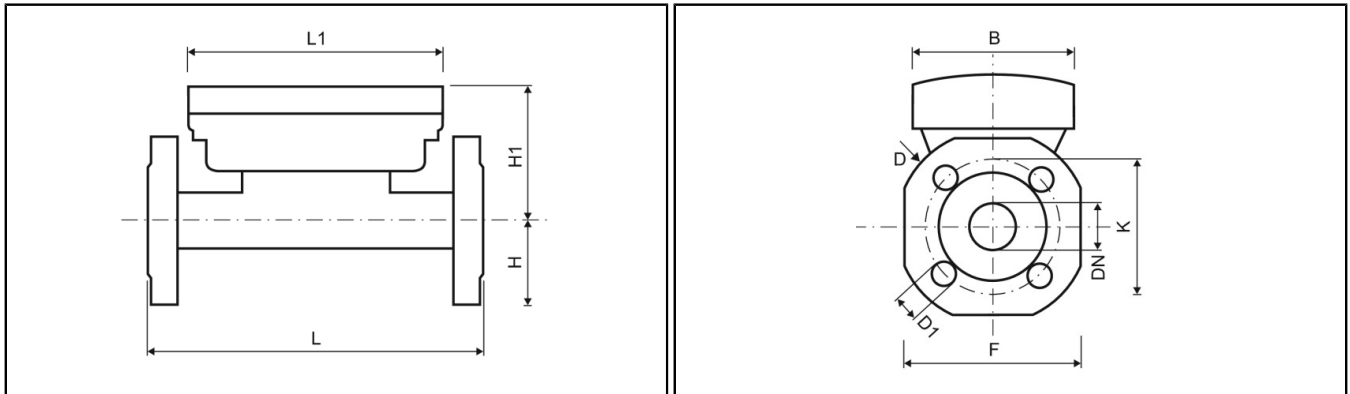

Nominal flow rate	q _p	m ³ /h	0.6	0.6	0.6	1.5	1.5	1.5	1.5
Nominal diameter	DN	mm	15	20	20	15	15	20	20
Overall length	L	mm	110	130	190	110	165	130	190
Length of calculator	L1	mm	-	-	150	-	-	-	150
Height	H	mm	-	-	47.5	-	-	-	47.5
Height	H1	mm	-	-	84	-	-	-	84
Height of calculator	H2	mm	-	-	54	-	-	-	54
Width of calculator	B	mm	-	-	100	-	-	-	100
Flange dimension	F	mm	-	-	95	-	-	-	95
Flange diameter	D	mm	-	-	105	-	-	-	105
Hole circle diameter	K	mm	-	-	75	-	-	-	75
Screw hole diameter	D1	mm	-	-	14	-	-	-	14
Number of screw holes		pcs	-	-	4	-	-	-	4
Weight brass body ²		kg	-	-	2.75	-	-	-	2.75
Weight spheroidal cast iron body ²		kg	-	-	-	-	-	-	-

Nominal flow rate	q _p	m ³ /h	2.5	2.5	3.5	3.5	3.5	3.5	3.5
Nominal diameter	DN	mm	20	20	25	25	25	32	32
Overall length	L	mm	130	190	135	150	260	150	260
Length of calculator	L1	mm	-	150	-	-	150	-	150
Height	H	mm	-	47.5	-	-	50	-	62.5
Height	H1	mm	-	84	-	-	88.5	-	88.5
Height of calculator	H2	mm	-	54	-	-	54	-	54
Width of calculator	B	mm	-	100	-	-	100	-	100
Flange dimension	F	mm	-	95	-	-	100	-	125
Flange diameter	D	mm	-	105	-	-	114	-	139
Hole circle diameter	K	mm	-	75	-	-	85	-	100
Screw hole diameter	D1	mm	-	14	-	-	14	-	18
Number of screw holes		pcs	-	4	-	-	4	-	4
Weight brass body ²		kg	-	2.75	-	-	3.5	-	4.8
Weight spheroidal cast iron body ²		kg	-	-	-	-	-	-	-

SHARKY 775 - COMPACT ENERGY METER | ULTRASONIC


Nominal flow rate	q _p	m ³ /h	6	6	6	6	6	6	10
Nominal diameter	DN	mm	25	25	25	32	32	40	40
Overall length	L	mm	135	150	260	150	260	150	200
Length of calculator	L1	mm	-	-	150	-	150	-	-
Height	H	mm	-	-	50	-	62.5	-	-
Height	H1	mm	-	-	88.5	-	88.5	-	-
Height of calculator	H2	mm	-	-	54	-	54	-	-
Width of calculator	B	mm	-	-	100	-	100	-	-
Flange dimension	F	mm	-	-	100	-	125	-	-
Flange diameter	D	mm	-	-	114	-	139	-	-
Hole circle diameter	K	mm	-	-	85	-	100	-	-
Screwhole diameter	D1	mm	-	-	14	-	18	-	-
Number of screwholes		pcs	-	-	4	-	4	-	-
Weight brass body ²		kg	-	-	3.5	-	4.8	-	-
Weight spheroidal cast iron body ²		kg	-	-	-	-	-	-	-

Nominal flow rate	q _p	m ³ /h	10	15	25	40	60	100
Nominal diameter	DN	mm	40	50	65	80	100	100
Overall length	L	mm	300	270	300	300	360	360
Length of calculator	L1	mm	150	150	150	150	150	150
Height	H	mm	69	73.5	85	92.5	108	108
Height	H1	mm	94	99	106.5	114	119	119
Height of calculator	H2	mm	54	54	54	54	54	54
Width of calculator	B	mm	100	100	100	100	100	100
Flange dimension	F	mm	138	147	170	185	216	216
Flange diameter	D	mm	148	163	184	200	235	235
Hole circle diameter	K	mm	110	125	145	160	180 ¹ /190	180 ¹ /190
Screwhole diameter	D1	mm	18	18	18	19	19 ¹ /22	19 ¹ /22
Number of screwholes		pcs	4	4	8	8	8	8
Weight brass body ²		kg	6.4	7.0	8.9	10.9	16.4	16.4
Weight spheroidal cast iron body ²		kg	-	5.9	7.7	9.6	15.2	15.2

¹ Value for PN 16 housing

² Meter with A-cell, without modules, 1.4 m cable length, 1.9 m cable length of temperature sensor Ø 5.2 mm

PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH

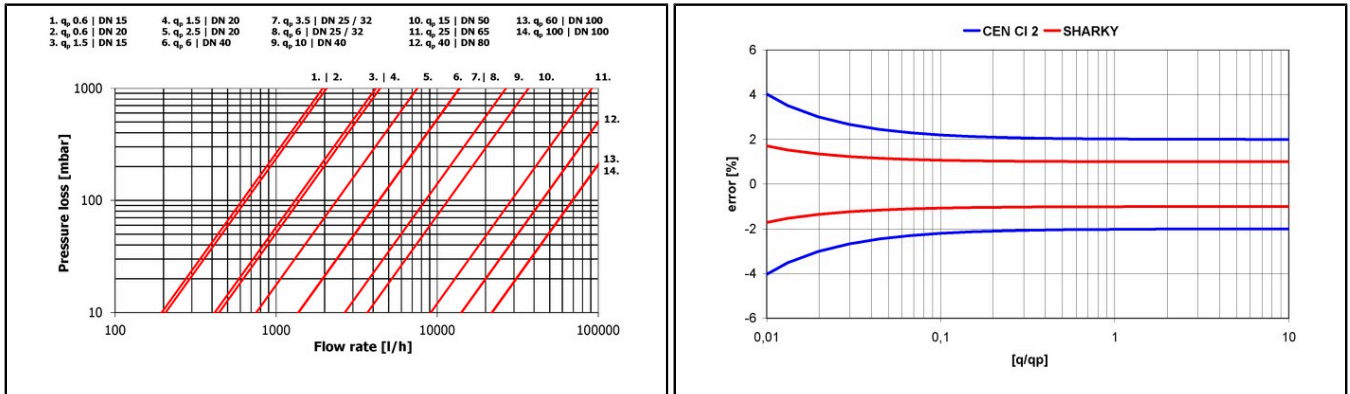

Pressure loss graph

Typical error graph

REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains components with the following substances in a concentration of more than 0.1% weight by weight (w/w):

- Lead (CAS no.: 7439-92-1)
- Lead titanium zirconium oxide (CAS no.: 12626-81-2)

Economic Actor Information

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: metering-germany-info@diehl.com

Diehl Metering GmbH
Donaustraße 120
90451 Nürnberg
Germany
Phone: +49 911 6424-0
metering-germany-info@diehl.com
www.diehl.com/metering

**EMPOWER A
SUSTAINABLE
FUTURE**