

VZ04 / VZ08

INDUSTRIAL METER



APPLICATION

VZO is a volumetric meter with an oscillating piston. The principle of volumetric metering ensures high precision with low flow rates and excellent endurance. VZO may be installed horizontally, vertically or at an angle. When used with burners, it may be fitted directly on the nozzle line.

Thanks to its materials - cast iron, brass and aluminium piston - VZO is particularly appropriate for metering non-aggressive liquid lubricants such as fuel oil or mineral oil.

VZO may be fitted with a pulse emitter. The variety of values and types of pulse make VZO compatible with all centralized technical management systems.

FEATURES

- Volumetric meter
- Designed for oil and fuel
- Different pulse values
- Low starting flow rate

METROLOGICAL DATA

Nominal diameter	DN	mm	4	8
Starting flow rate		l/h	0.4	1.6
Minimum flow rate	Qmin	l/h	1	4
Maximum flow rate	Qmax	l/h	80	200
Permanent flow rate		l/h	50	135
Error tolerance of volume between Qmin and Qmax			< ±1 %*	< ±1 %*
Repeatability			< ±0.2 %	< ±0.2 %


* Error tolerance 0.5 ... 1 l/h = ±5% / 1 ... 2 l/h = ±2.5%
 For burners and engines or motors, the meter must be selected on the basis of the nominal flow rate.
 Meters destined to 2 speed burners are selected knowing Qmax can't be exceeded with the higher mode.

TEMPERATURE AND PRESSURE

VZO4 / VZO8

Max. temperature	°C	50 or 80
Nominal pressure	bar	25

DIMENSIONS

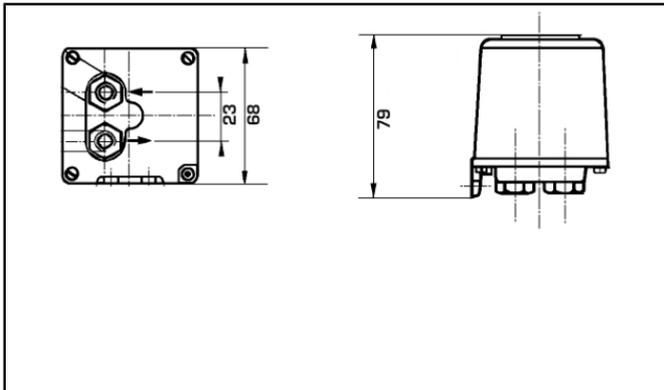


Nominal diameter	DN	mm	4	8
Length		mm	68	68
Depth		mm	68	68
Height		mm	78	78
Width of mesh from prefilter/ filtre		mm	0.125 / 0.08	0.15 / 0.1
Threaded connections		inches	1/8"	1/4"
Weight without connection		kg	0.65	0.75

HEAD LOSS

Nominal diameter	DN	mm	4	8
kvs ($\Delta P = Q^2 / Kvs^2$) à 5 mPa.s			0.22	0.5

PULSE EMITTER

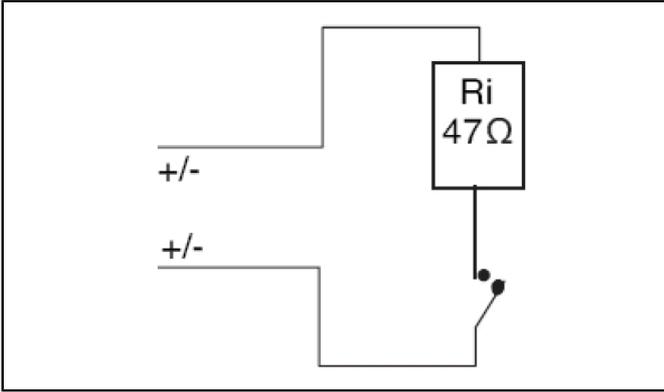

Nominal diameter	DN	mm	4	8
Weight of impulse in litre			0.1	1

This technology doesn't require straight length.

Economic Actor Information

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: metering-germany-info@diehl.com

Diehl Metering S.A.S.
Head Office
67 rue du Rhône
BP 10160
FR-68304 Saint-Louis Cedex
Phone: + 33 (0)3 89 69 54 00
Fax: + 33 (0)3 89 69 72 20
metering-France-info@diehl.com

International Sales
67 rue du Rhône
BP 10160
FR-68304 Saint-Louis Cedex
Phone: + 33 (0)3 89 69 54 21
Fax: + 33 (0)3 89 69 54 22
metering-France-export@diehl.com
www.diehl.com/metering

**EMPOWER A
SUSTAINABLE
FUTURE**