

DIEHL Metering

APPLICATION

Meter for measuring heavily fluctuating flow rates.

FEATURES

- Ideal design of housing and housing cover prevents sedimentation, stagnant water and air pockets
- No measuring errors in the switch-over range
- ▶ Encapsulated counter of glass/copper IP 68
- ▶ Good long-term measuring accuracy
- Complete head unit with counter and sensors can be rotated by 350° for easier reading
- System compatibility, WESAN WPV A G can be extended with IZAR RADIO (clip on radio module), IZAR PULSE (clip on pulse module) or IZAR M-BUS I (clip on M-Bus module)
- In order to secure a safe switch-over the WESAN WPV A G needs a minimum ingoing pressure of 0.6 bar

WESAN WPV A G

BULK WATER METER | WOLTMAN

GENERAL

			WESAN WPV A G	
Medium temperature range		°C	1 30	
Temperature safety		°C	1 50	
Ambient operating temperature		°C	1 55	
Ambient storage temperature		°C	1 55	
Nominal pressure	PN	bar	16 ¹	
Display range			0.5 l 999,999 m ³	
Protection class			IP 68	
Available bypass meter			ALTAIR V4	

¹ versions with different nominal pressure on request (see also special versions)

TECHNICAL DATA

Nominal diameter	DN	mm	150
Permament flow rate	Q₃	m³/h	160
Minimum flow rate	Q_1	l/h	40
Transitional flow rate	Q_2	l/h	64
Overload flow rate	Q_4	m³/h	200
Starting flow rate		l/h	5
Permanent flow rate bypass			
meter	Q₃	m³/h	16
Switch-over flow rate rising		l/h	4350
Switch-over flow rate falling		l/h	7800

APPROVAL

Nominal diameter	DN	mm	150
MID (DE-17-MI001-PTB003)			•
Dynamic range bypass meter			
ALTAIR V3 (Q ₃ /Q ₁)	R		4000 H
Potable water			KTW / W270

REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains components with the following substances in a concentration of more than 0.1% weight by weight (w/w):

- Lead (CAS no.: 7439-92-1)


SPECIAL VERSIONS


- Versions with different nominal pressure on request
- Special flange holes on request

WESAN WPV A G

BULK WATER METER | WOLTMAN


DIMENSIONS

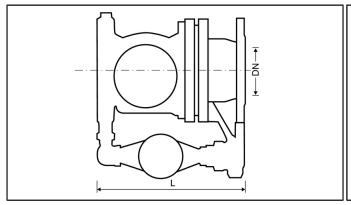




Nominal diameter	DN	mm	150
Overall length (DIN 19625)	L	mm	500 ± 15
Flange diameter	D	mm	285
Hole circle diameter	K	mm	240
Number of screwholes		pcs	8
Screwhole diameter	D1	mm	22
Height	Н	mm	150
Height	H1	mm	210
Height to remove measuring			
insert		mm	475
Width	B1	mm	143
Width	B2	mm	310
Diameter	ØВ	mm	115
Weight of complete meter		kg	68

PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH





Pressure loss graph

Typical error graph