

ALTAIR V4 DN15/20

VOLUMETRIC METER

DIEHL
Metering



APPLICATION

ALTAIR V4 represents the latest generation of volumetric meters developed within the framework of the MID and European standards to meet field requirements. ALTAIR V4 is a particularly compact and robust meter, adapting to the most restrictive environments and compatible with varying water qualities. Modular, ALTAIR V4 can be fitted at any time with an IZAR clip-on module converting it into a communicating meter, ready for mobile or fixed network (radio/wired) reading.

FEATURES

- ▶ DN15/20
- ▶ $Q_3=2.5\text{m}^3/\text{h}$ (DN15) / $Q_3=4\text{m}^3/\text{h}$ (DN20)
- ▶ MID approval up to R=800
- ▶ Starting flowrate at 0.4 l/h
- ▶ Composite & brass version
- ▶ High dynamic range
- ▶ Installation in any position

ALTAIR V4 DN15/20

VOLUMETRIC METER

METROLOGICAL DATA

Nominal diameter		mm	15	15	15	15	15	20	20	20
Length*	L	mm	110	115	134	165	170	115	165	190
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
R standard*	Q ₃ /Q ₁		160	160	160	160	160	160	160	160
Starting flow rate		l/h	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
Minimum flow rate*	Q ₁	l/h	15.62	15.62	15.62	15.62	15.62	15.62	15.62	15.62
Transition flow rate*	Q ₂	l/h	25	25	25	25	25	25	25	25
Maximum flow rate	Q ₄	m ³ /h	3.125	3.125	3.125	3.125	3.125	3.125	3.125	3.125
Head loss at Q ₃		bar	0.59	0.59	0.59	0.59	0.59	0.59	0.59	0.59
Head loss at Q ₄		bar	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Kvs (deltaP=Q ² /Kvs ²)			3.25	3.25	3.25	3.25	3.25	3.25	3.25	3.25

* Other values on request

** Composite version

APPROVAL

	DN 15 - 20
MID approval	LNE - 6250 Type A2
Standards	ISO 4064 EN 14154 OIML R49
Sanitary conformity	ACS WRAS KTW BELGAQUA KIWA DM 174

REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains articles with the following substances in a concentration of more than 0.1% weight by weight (w/w):

- Lead


TEMPERATURES AND PRESSURE

		DN 15 - 20
Water temperature	°C	0.1 ... +50
Ambient operating temperature	°C	+1 ... +55
Storage temperature	°C	-10 ... +55
Nominal pressure	PN bar	16

ALTAIR V4 DN15/20

VOLUMETRIC METER

DIMENSIONS

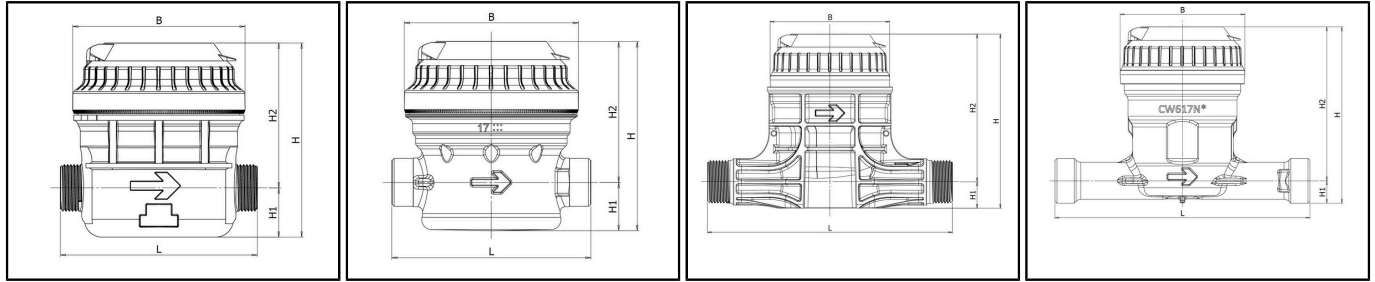

DN 15 - composite

DN 15 - brass


DN 20 - composite

DN 20 - brass


Nominal diameter	mm	15	15	15	15	15	20	20	20	
Length*	L	mm	110	115	134	165	170	115	165	190
Nominal flow rate	Q ₃	m ³ /h	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Housing			brass / composite	brass / composite	brass / composite	brass / composite	brass / composite	brass / composite	brass / composite	brass
Width	B	mm	96.2	96.2	96.2	96.2	96.2	96.2	96.2	95.9
Height	H	mm	104.4 / 109	104.4 / 109	104.4 / 109	104.4 / 109	104.4 / 109	109	104.4 / 109	104.1
Height	H1	mm	26.7 / 28	26.7 / 28	26.7 / 28	26.7 / 28	26.7 / 28	28	26.7 / 28	26.1
Height	H2	mm	77.7 / 81	77.7 / 81	77.7 / 81	77.7 / 81	77.7 / 81	81	77.7 / 81	78
Thread connections		inch	3/4"	3/4" - 7/8"	3/4"	3/4"	3/4"	1"	1"	1"
Weight		kg	0.9 / 0.5	1 / 0.5	1 / 0.6	1 / 0.6	1 / 0.6	0.5	1 / 0.6	1

*Other values on request.

PRECISION CURVE

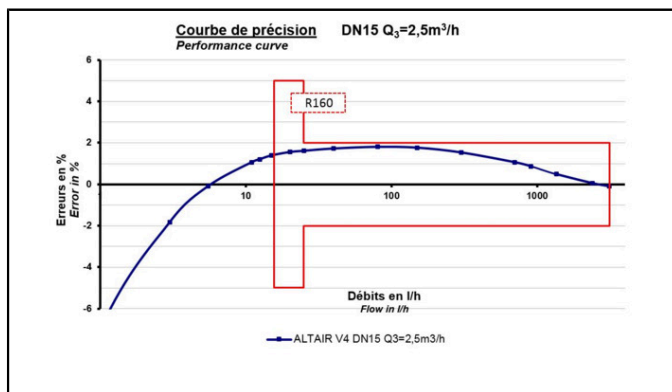

DN 15

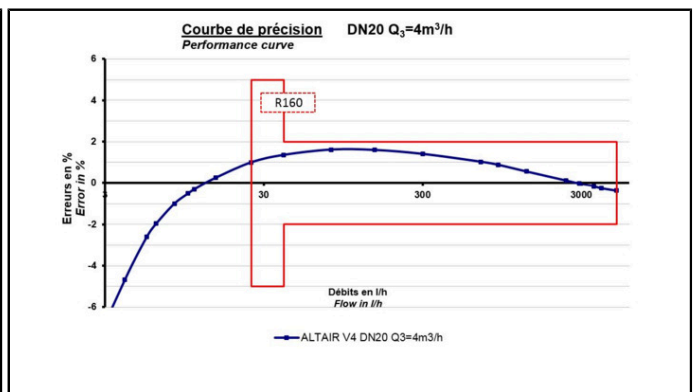

DN 20

This technology does not require straight length.

OPTIONS

- Non-return valve
- Pair of connectors
- Glass/metal register