

# HYDRUS 2.0

## Ultrasonic Meter



### APPLICATION

HYDRUS 2.0 is a static ultrasonic water meter designed for all applications of domestic cold water supply enabling accurate measuring with long-term stability under difficult conditions (no measurement of air and insensitive to sedimentation). Developed within the framework of the MID, it complies with the European regulations and holds sanitary conformity certificates (AoC DEU, ACS, WRAS and others). The integrated communication function supports meter data provision via mobile reading (walk-by/drive-by/passive drive-by) or fixed network (upgrade without on-site configuration). In combination with Diehl Metering's IZAR fixed network system, which stands out with excellent coverage, high data granularity and timeliness will be maintained. This is what makes it a high responsive infrastructure to take actions immediately.

### FEATURES

- DN 15 to 50 (brass), DN 15 to 20 (composite)
- MID approved with dynamic range up to R 800
- IP 68 suitable for outdoor installations
- Integrated communication based on OMS specifications
- Wireless M-Bus for mobile reading in parallel to Fixed Network
- mioty®4OMS for OMS Generation 5 Fixed Network
- OMS over LoRaWAN® for LoRaWAN Fixed Network
- M-Bus/Pulse/Pulse, wireless M-Bus, wireless M-Bus along with L-Bus/Pulse
- Display with error and alarm codes including leakage detection
- Battery lifetime up to 16 years
- U0 / D0, no need for calming sections

**GENERAL**

		<b>HYDRUS 2.0</b>	
Medium temperature range	°C	+0.1 ... +90	
Ambient operating temperature	°C	-10 ... +55	
Ambient storage temperature	°C	-10 ... +70 (>35 °C max. 4 weeks)	
Environmental class		O (Outdoors)	
Mechanical environmental class		M2	
Electromagnetic environmental class		E2	
Housing material		Composite; Brass	
Nominal pressure	MAP bar	16	
Power supply		Two 3.6 VDC lithium batteries	
Battery lifetime <sup>1</sup>		Up to 16 years	
Communication interfaces		Optical, OMS Generation 5 (mioty®4OMS) 868 MHz, OMS Generation 3/4 wireless M-Bus 434/868 MHz, M-Bus, L-Bus and Pulse, LoRaWAN® 868 MHz, mioty® for Metering 434/868 MHz	
Data storage		For errors, alarms and measuring values, data logging capabilities to record up to 1024 daily values +32 monthly values and two annual due dates	
Protection class		IP 68	

<sup>1</sup> Depends on the sending interval of the radio telegram, the telegram length and the ambient temperature at the installation

**TECHNICAL DATA DISPLAY**

		<b>HYDRUS 2.0</b>
Display indication		LCD, 9-digit, additional symbols/display counter/unit
Units displayed DN 15 - DN 50		Volume (m <sup>3</sup> + 3 decimal places) and flow rate (m <sup>3</sup> /h + 3 decimal places)
Values displayed		Display test - volume - battery lifetime - firmware version - software checksum - flow - current/continuous/historical error - alarm status - high resolution volume - due date - due date volume - reverse volume - display counter - low battery indication - leakage indication - metrological log access - radio signal ON/OFF - alarm indication - billing value indication - and more display loop options to choose from.

**INTERFACES - OVERVIEW**

		<b>HYDRUS 2.0</b>
Optical		For switching the display loop and configuring / reading the meter via IZAR@MOBILE
Wireless M-Bus		434 or 868 MHz, OMS Generation 3/4, OMS radio as standard for mobile reading (R3) sent every 14 / 64 seconds (default) and wireless M-Bus for fixed network (R4/ R4+) sent every 5 / 15 / 60 minutes
mioty®4OMS		868 MHz, OMS Generation 5, OMS as standard for mobile reading (R3) sent every 64 seconds (default) and mioty®4OMS for fixed network sent every 60 minutes
mioty® for Metering		434 or 868 MHz, OMS Generation 3/4, OMS radio as standard for mobile reading (R3) sent every 64 seconds (default) and mioty® for Metering for fixed network (L1C) sent every 60 minutes
LoRaWAN®		868 MHz, OMS over LoRaWAN® for fixed network sent every 3 h / 5 h / 6 h (default) and OMS as standard for mobile reading (R3) sent every 64 seconds (default); Complies to v1.0.3, certified to v1.0.2, Class A, supports Adaptive data rate (ADR) and Over The Air (OTA) activation
M-Bus		2400 baud, cable length 1.5 m, power supply only via built-in battery combined with two Pulse outputs
L-Bus		In combination with radio models, cable length 1.5 m (only one interface communicating at the same time)
Pulse (Open drain)		Two Pulse outputs, or one Pulse and one L-Bus output, Pulse cable length 1.5 m

## SECURITY

HYDRUS 2.0	
Wireless M-Bus	OMS Generation 4 Profile B, individual keys (default) / OMS Generation 3 (selectable)
mioty®4OMS	OMS Generation 4 Profile B, individual keys (default)
mioty® for Metering	OMS Generation 4 Profile B, individual keys (default) / OMS Generation 3 (selectable)
LoRaWAN®	Fixed Network uses internal LoRaWAN® transport encryption; Mobile Network uses OMS Generation 4 Profile B, individual keys (default)

## PRIVACY

The HYDRUS 2.0 stores internally historical consumption values. Logging data is available by local reading with IZAR@MOBILE and remote reading. Optical and radio communication implements encryption and authentication according to OMS Specification and LoRaWAN® specification.

## VOLUME / PULSE OPEN DRAIN

HYDRUS 2.0		
Max. input voltage	V	30
Max. input current	mA	27
Max. voltage drop at active output	V/mA	2/27
Max. current through inactive output	µA/V	5/30
Max. reverse voltage without destroying outputs	V	6 (in case current does not exceed 27 mA)
Pulse rates	l/pulse	Decadic 1 / 10 (depending on nominal diameter)
Pulse output 1 variants		Total volume or forward volume
Pulse output 2 variants		Flow direction or error or reverse volume
Pulse frequency		Max. frequency 10 Hz
Pulse width		50 - 500 ms

## POSSIBLE COMMUNICATION INTERFACES

HYDRUS 2.0	
Wireless M-Bus/Pulse/L-Bus	434 or 868 MHz + 3 wires
Wireless M-Bus only	434 or 868 MHz + without wire
mioty®4OMS and OMS radio/Pulse/L-Bus	868 MHz + 3 wires
mioty®4OMS and OMS radio only	868 MHz + without wire
mioty® for Metering and OMS radio/Pulse/L-Bus	434 or 868 MHz + 3 wires
mioty® for Metering and OMS radio only	434 or 868 MHz + without wire
LoRaWAN® and OMS radio only	868 MHz + without wire
M-Bus only	2 wires
M-Bus/Pulse/Pulse	5 wires
Pulse/Pulse	3 wires (without fraud) or 4 wires (with fraud)
IZAR BE PULSE	4 wires (with fraud)

## REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains components with the following substances in a concentration of more than 0.1% weight by weight (w/w):

- Lead (only for the flange variants) - (CAS no.: 7439-92-1)

**HYDRUS 2.0 - ULTRASONIC METER**

- Lead titanium zirconium oxide (CAS no.: 12626-81-2)

TECHNICAL DATA

Nominal diameter	DN	mm	15	15	15	15	15 <sup>2</sup>	15
Permanent flow rate	Q <sub>3</sub>	m <sup>3</sup> /h	1.6	1.6	1.6	2.5	2.5	2.5
Overall length	L	mm	110	165	170	110	115	165
Dynamic (Q <sub>3</sub> /Q <sub>1</sub> )	R		400	400	400	800	800	800
Overload flow rate	Q <sub>4</sub>	m <sup>3</sup> /h	2	2	2	3.125	3.125	3.125
Transitional flow rate	Q <sub>2</sub>	l/h	6.4	6.4	6.4	5	5	5
Minimum flow rate	Q <sub>1</sub>	l/h	4	4	4	3.13	3.13	3.13
Starting flow rate		l/h	1.4	1.4	1.4	1.4	1.4	1.4
Pressure loss at Q <sub>3</sub>		bar	0.19	0.19	0.19	0.46	0.46	0.46
Pressure loss at Q <sub>4</sub>		bar	0.3	0.3	0.3	0.72	0.72	0.72
Maximum flow rate <sup>1</sup>	Q <sub>high</sub>	m <sup>3</sup> /h	2.8	2.8	2.8	4.37	4.37	4.37
Flow coefficient	K <sub>v</sub>	m <sup>3</sup> /h	3.67	3.67	3.67	3.69	3.69	3.69

Nominal diameter	DN	mm	15	20	20	20	20	20
Permanent flow rate	Q <sub>3</sub>	m <sup>3</sup> /h	2.5	2.5	2.5	2.5	4	4
Overall length	L	mm	170	115	130	190	105	115
Dynamic (Q <sub>3</sub> /Q <sub>1</sub> )	R		800	400	800	800	400	630
Overload flow rate	Q <sub>4</sub>	m <sup>3</sup> /h	3.125	3.125	3.125	3.125	5	5
Transitional flow rate	Q <sub>2</sub>	l/h	5	10	5	5	16	10
Minimum flow rate	Q <sub>1</sub>	l/h	3.13	6.25	3.13	3.13	10	6.3
Starting flow rate		l/h	1.4	1.4	1.4	1.4	3.0	3.0
Pressure loss at Q <sub>3</sub>		bar	0.46	0.4	0.4	0.4	0.37	0.4
Pressure loss at Q <sub>4</sub>		bar	0.72	0.63	0.63	0.63	0.58	0.63
Maximum flow rate <sup>1</sup>	Q <sub>high</sub>	m <sup>3</sup> /h	4.37	4.37	4.37	4.37	7	7
Flow coefficient	K <sub>v</sub>	m <sup>3</sup> /h	3.69	3.95	3.95	3.95	6.58	6.32

Nominal diameter	DN	mm	20	20	20	20	20
Permanent flow rate	Q <sub>3</sub>	m <sup>3</sup> /h	4	4	4	4	4
Overall length	L	mm	130	165	175	190	220
Dynamic (Q <sub>3</sub> /Q <sub>1</sub> )	R		800	800	800	800	800
Overload flow rate	Q <sub>4</sub>	m <sup>3</sup> /h	5	5	5	5	5
Transitional flow rate	Q <sub>2</sub>	l/h	8	8	8	8	8
Minimum flow rate	Q <sub>1</sub>	l/h	5	5	5	5	5
Starting flow rate		l/h	2.5	2.5	2.5	2.5	2.5
Pressure loss at Q <sub>3</sub>		bar	0.4	0.4	0.4	0.4	0.4
Pressure loss at Q <sub>4</sub>		bar	0.63	0.63	0.63	0.63	0.63
Maximum flow rate <sup>1</sup>	Q <sub>high</sub>	m <sup>3</sup> /h	7	7	7	7	7
Flow coefficient	K <sub>v</sub>	m <sup>3</sup> /h	6.32	6.32	6.32	6.32	6.32

<sup>1</sup> Outlet pressure minimum 3 bar, maximum 100 hours per year, closed pipeline network

<sup>2</sup> Please see table DIMENSIONS

APPROVAL

DN 15 - 20

Approval		MID DE-19-MI001-PTB012
Dynamic range (Q <sub>3</sub> /Q <sub>1</sub> )	R	Up to 800
Standards		EN 4064, EN 14154, OIML R49
Sanitary conformity		AoC DEU, ACS, WRAS, Belgaqua, KIWA Netherlands, OTH, PZH, SVGW
OMS Certification		OMS Generation 4
LoRaWAN® certification		1.0.2


**DYNAMIC RANGE (R=Q3/Q1)**

**DN 15 - 20**

Q <sub>3</sub> 1.6 m <sup>3</sup> /h - T30 / T50	R	400
Q <sub>3</sub> 1.6 m <sup>3</sup> /h - T70 / T90	R	400H; 250V
Q <sub>3</sub> 2.5 m <sup>3</sup> /h - T30 / T50	R	160; 800 (400 for L 115 mm)
Q <sub>3</sub> 2.5 m <sup>3</sup> /h - T70 / T90	R	160; 400; 800H / 400V (250 for L 115 mm)
Q <sub>3</sub> 4 m <sup>3</sup> /h - T30	R	160; 400; 800 (630 for L 105 mm and 115 mm)
Q <sub>3</sub> 4 m <sup>3</sup> /h - T50 / T70 / T90	R	160; 400; 800H / 400V (630H for L 105 mm and 115 mm)

H = horizontal installation position / V = vertical installation position  
Other values on request

**DIMENSIONS**

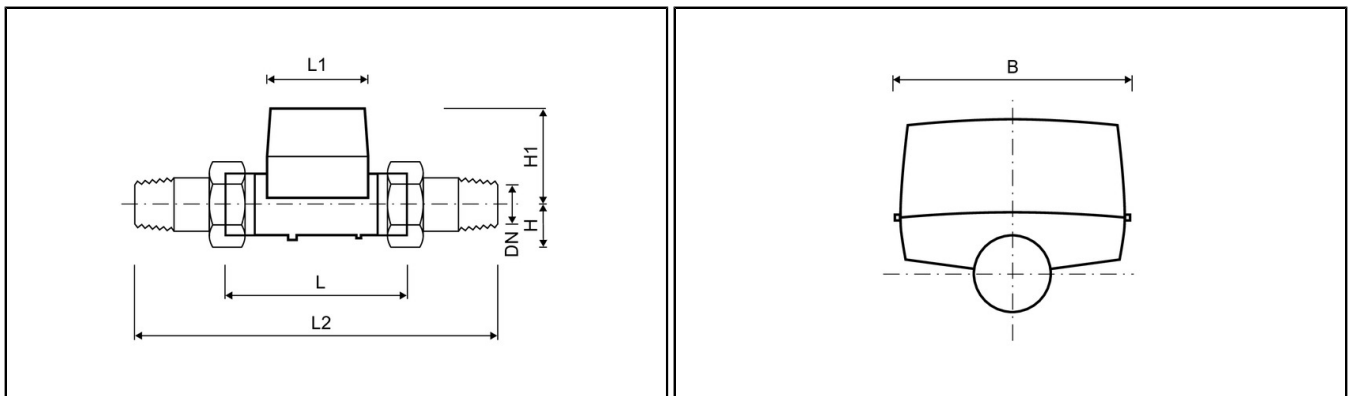

Nominal diameter	DN	mm	15	15	15	15	15 <sup>2</sup>	15
Permanent flow rate	Q <sub>3</sub>	m <sup>3</sup> /h	1.6	1.6	1.6	2.5	2.5	2.5
Overall length	L	mm	110	165	170	110	115	165
Housing			brass/ composite	brass/ composite	brass/ composite	brass/ composite	brass/ composite	brass/ composite
Counter length	L1	mm	89	89	89	89	89	89
Counter width	B	mm	89	89	89	89	89	89
Overall length with coupling	L2	mm	190	245/250	250	190	195	245
Connection thread on meter		Inch	G <sup>3</sup> / <sub>4</sub> B	G <sup>3</sup> / <sub>4</sub> B	G <sup>3</sup> / <sub>4</sub> B	G <sup>3</sup> / <sub>4</sub> B	G <sup>3</sup> / <sub>4</sub> B	G <sup>3</sup> / <sub>4</sub> B
Connection thread of coupling		Inch	R <sup>1</sup> / <sub>2</sub>	R <sup>1</sup> / <sub>2</sub>	R <sup>1</sup> / <sub>2</sub>	R <sup>1</sup> / <sub>2</sub>	R <sup>1</sup> / <sub>2</sub>	R <sup>1</sup> / <sub>2</sub>
Height	H1	mm	71	71	71	71	71	71
Weight without coupling (approx.)		kg	0.7 / 0.5	0.8 / 0.6	0.8 / 0.6	0.7 / 0.5	0.7 / 0.5	0.8 / 0.6
Weight with coupling (approx.)		kg	1.1 / 0.9	1.2 / 1.0	1.2 / 1.0	1.1 / 0.9	1.1 / 0.9	1.2 / 1.0
Height	H	mm	18	18	18	18	18	18

## HYDRUS 2.0 - ULTRASONIC METER


Nominal diameter	DN	mm	15	20	20	20	20	20
Permanent flow rate	Q <sub>3</sub>	m <sup>3</sup> /h	2.5	2.5	2.5	2.5	4	4
Overall length	L	mm	170	115	130	190	105	115
Housing			brass/ composite	brass	brass	brass/ composite	brass	brass
Counter length	L1	mm	89	89	89	89	89	89
Counter width	B	mm	89	89	89	89	89	89
Overall length with coupling	L2	mm	250	215	230	290	205	215
Connection thread on meter		Inch	G <sup>3</sup> / <sub>4</sub> B	G1B	G1B	G1B	G1B	G1B
Connection thread of coupling		Inch	R <sup>1</sup> / <sub>2</sub>	R <sup>3</sup> / <sub>4</sub>	R <sup>3</sup> / <sub>4</sub>	R <sup>3</sup> / <sub>4</sub>	R <sup>3</sup> / <sub>4</sub>	R <sup>3</sup> / <sub>4</sub> <sup>1</sup>
Height	H1	mm	71	74	74	74	74	74
Weight without coupling (approx.)		kg	0.8 / 0.6	0.8	0.8	0.9 / 0.6	0.8	0.8
Weight with coupling (approx.)		kg	1.2 / 1.0	1.2	1.2	1.3 / 1.0	1.2	1.2
Height	H	mm	18	21	21	21	21	21

Nominal diameter	DN	mm	20	20	20	20	20
Permanent flow rate	Q <sub>3</sub>	m <sup>3</sup> /h	4	4	4	4	4
Overall length	L	mm	130	165	175	190	220
Housing			brass	brass	brass	brass/ composite	brass
Counter length	L1	mm	89	89	89	89	89
Counter width	B	mm	89	89	89	89	89
Overall length with coupling	L2	mm	230	295	295	290	320
Connection thread on meter		Inch	G1B	G <sup>1</sup> / <sub>4</sub> B	G <sup>1</sup> / <sub>4</sub> B	G1B	G1B
Connection thread of coupling		Inch	R <sup>3</sup> / <sub>4</sub>	R1	R1	R <sup>3</sup> / <sub>4</sub>	R <sup>3</sup> / <sub>4</sub>
Height	H1	mm	74	74	74	74	74
Weight without coupling (approx.)		kg	0.8	1.0	1.0	0.9 / 0.6	1.2
Weight with coupling (approx.)		kg	1.2	1.6	1.6	1.3 / 1.0	1.4
Height	H	mm	21	27	27	21	21


<sup>1</sup> Wrench size should not be bigger than 38 mm

<sup>2</sup> Further version with connection thread on meter inlet G7/8B and meter outlet G3/4B on request.

## PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH

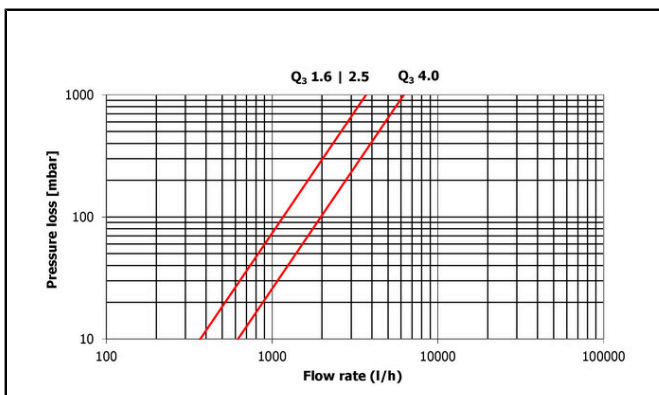

Pressure loss graph

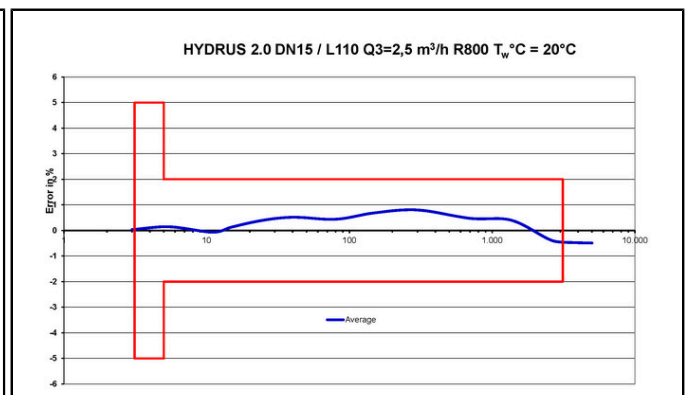

Typical error graph

**TECHNICAL DATA**

Nominal diameter	DN	mm	25	25	25	25	25	25	25	32
Permanent flow rate	Q <sub>3</sub>	m <sup>3</sup> /h	6.3	6.3	6.3	6.3	10	10	10	10
Overall length	L	mm	135	150	175	260	150	175	260	260
Dynamic (Q <sub>3</sub> /Q <sub>1</sub> )	R		400	400	400	400	800	800	800	800
Overload flow rate	Q <sub>4</sub>	m <sup>3</sup> /h	7.87	7.87	7.87	7.87	12.5	12.5	12.5	12.5
Transitional flow rate	Q <sub>2</sub>	l/h	25.2	25.2	25.2	25.2	20	20	20	20
Minimum flow rate	Q <sub>1</sub>	l/h	15.8	15.8	15.8	15.8	12.5	12.5	12.5	12.5
Starting flow rate		l/h	5	5	5	5	5	5	5	5
Pressure loss at Q <sub>3</sub>		bar	0.19	0.19	0.19	0.19	0.48	0.48	0.48	0.33
Pressure loss at Q <sub>4</sub>		bar	0.3	0.3	0.3	0.3	0.75	0.75	0.75	0.51
Maximum flow rate <sup>1</sup>	Q <sub>high</sub>	m <sup>3</sup> /h	11.02	11.02	11.02	11.02	17.5	17.5	17.5	17.5
Flow coefficient	K <sub>v</sub>	m <sup>3</sup> /h	14.45	14.45	14.45	14.45	14.43	14.43	14.43	17.41

Nominal diameter	DN	mm	40	40	40	40	50	50	50	50
Permanent flow rate	Q <sub>3</sub>	m <sup>3</sup> /h	10	10	16	16	16	16	25	25
Overall length	L	mm	200	300	200	300	270	300	270	300
Dynamic (Q <sub>3</sub> /Q <sub>1</sub> )	R		400	400	800	800	250	250	400	400
Overload flow rate	Q <sub>4</sub>	m <sup>3</sup> /h	12.5	12.5	20	20	20	20	31.25	31.25
Transitional flow rate	Q <sub>2</sub>	l/h	40	40	32	32	102	102	100	100
Minimum flow rate	Q <sub>1</sub>	l/h	25	25	20	20	64	64	62.5	62.5
Starting flow rate		l/h	8.7	8.7	8.7	8.7	25	25	25	25
Pressure loss at Q <sub>3</sub>		bar	0.1	0.1	0.2	0.2	0.14	0.14	0.33	0.33
Pressure loss at Q <sub>4</sub>		bar	0.16	0.16	0.31	0.31	0.22	0.22	0.52	0.52
Maximum flow rate <sup>1</sup>	Q <sub>high</sub>	m <sup>3</sup> /h	17.5	17.5	28	28	32.13	32.13	32.13	32.13
Flow coefficient	K <sub>v</sub>	m <sup>3</sup> /h	31.62	31.62	36.0	36.0	44.0	44.0	44.0	44.0

<sup>1</sup> Outlet pressure minimum 3 bar, maximum 100 hours per year, closed pipeline network

**APPROVAL**

		DN 25 - 50
Approval		MID DE-19-MI001-PTB012
Dynamic range (Q <sub>3</sub> /Q <sub>1</sub> )	R	Up to 800
Standards		EN 4064, EN 14154, OIML R49
Sanitary conformity		AoC DEU, ACS, WRAS, Belgaqua, KIWA Netherlands, OTH, PZH, SVGW
OMS Certification		OMS Generation 4
LoRaWAN® certification		1.0.2


**DYNAMIC RANGE (R=Q3/Q1)**

		DN 25 - 50
Q <sub>3</sub> 6.3 m <sup>3</sup> /h - T30	R	160; 400
Q <sub>3</sub> 6.3 m <sup>3</sup> /h - T50 / T70 / T90	R	160; 400H / 250V
Q <sub>3</sub> 10 m <sup>3</sup> /h - DN 25, DN 32 - T30	R	160; 400; 800
Q <sub>3</sub> 10 m <sup>3</sup> /h - DN 25, DN 32 - T50 / T70 / T90	R	160; 400; 800H / 400V
Q <sub>3</sub> 16 m <sup>3</sup> /h - DN 40 - T30	R	160; 400; 800
Q <sub>3</sub> 16 m <sup>3</sup> /h - DN 40 - T50 / T70 / T90	R	160; 400; 800H / 400V
Q <sub>3</sub> 16 m <sup>3</sup> /h - DN 50	R	250
Q <sub>3</sub> 25 m <sup>3</sup> /h - DN 50	R	400

## HYDRUS 2.0 - ULTRASONIC METER

H = horizontal installation position / V = vertical installation position  
Other values on request

### DIMENSIONS

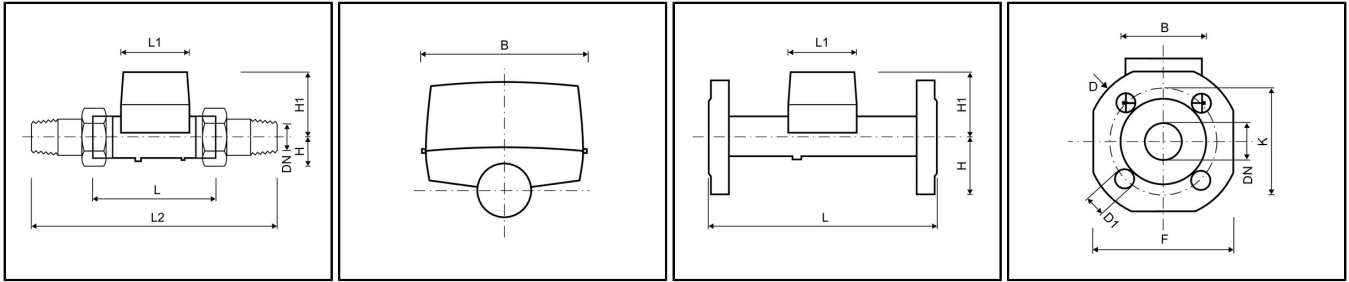


Nominal diameter	DN	mm	25	25	25	25	25	25	25	32
Permanent flow rate	Q <sub>3</sub>	m <sup>3</sup> /h	6.3	6.3	6.3	6.3	10	10	10	10
Overall length	L	mm	135	150	175	260	150	175	260	260
Housing			brass	brass	brass	brass	brass	brass	brass	brass
Counter length	L1	mm	89	89	89	89	89	89	89	89
Counter width	B	mm	89	89	89	89	89	89	89	89
DIMENSIONS - THREAD										
Overall length with coupling	L2	mm	255	270	295	380	270	295	380	380
Connection thread on meter		Inch	G1¼B	G1¼B	G1¼B	G1¼B	G1¼B	G1¼B	G1¼B	G1½B
Connection thread of coupling		Inch	R1	R1	R1	R1	R1	R1	R1	R1¼
Height	H1	mm	78	78	78	78	78	78	78	78
Weight without coupling (approx.)		kg	1.0	1.0	1.1	1.4	1.0	1.4	1.4	1.5
Weight with coupling (approx.)		kg	1.6	1.6	1.7	2.0	1.6	2.0	2.0	2.1
Height	H	mm	27	27	27	27	27	27	27	30
DIMENSIONS - FLANGE										
Flange diameter	D	mm	-	-	-	115	-	-	115	140
Hole circle diameter	K	mm	-	-	-	85	-	-	85	100
Number of screwholes		pcs	-	-	-	4	-	-	4	4
Screwhole diameter	D1	mm	-	-	-	14	-	-	14	18
Height	H	mm	-	-	-	50	-	-	50	62.5
Height	H1	mm	-	-	-	84	-	-	84	84
Width	F	mm	-	-	-	100	-	-	100	125
Weight with flanges (approx.)		kg	-	-	-	3.4	-	-	3.4	4.6


**HYDRUS 2.0 - ULTRASONIC METER**

Nominal diameter	DN	mm	40	40	40	40	50	50	50	50
Permanent flow rate	Q <sub>3</sub>	m <sup>3</sup> /h	10	10	16	16	16	16	25	25
Overall length	L	mm	200	300	200	300	270	300	270	300
Housing			brass	brass	brass	brass	brass	brass	brass	brass
Counter length	L1	mm	96	96	96	96	92	92	92	92
Counter width	B	mm	89	89	89	89	94	94	94	94
DIMENSIONS - THREAD										
Overall length with coupling	L2	mm	340	440	340	440	390	420	390	420
Connection thread on meter		Inch	G2B	G2B	G2B	G2B	G2½B	G2½B	G2½B	G2½B
Connection thread of coupling		Inch	R1½	R1½	R1½	R1½	R2	R2	R2	R2
Height	H1	mm	82	82	82	82	90	90	90	90
Weight without coupling (approx.)		kg	1.8	2.6	1.8	2.6	3.9	4.05	3.9	4.05
Weight with coupling (approx.)		kg	3.0	3.8	3.0	3.8	5.5	5.65	5.5	5.65
Height	H	mm	36	36	36	36	41	41	41	41
DIMENSIONS - FLANGE										
Flange diameter	D	mm	-	148	-	148	-	-	-	-
Hole circle diameter	K	mm	-	110	-	110	-	-	-	-
Number of screwholes		pcs	-	4	-	4	-	-	-	-
Screwhole diameter	D1	mm	-	18	-	18	-	-	-	-
Height	H	mm	-	69	-	69	-	-	-	-
Height	H1	mm	-	87	-	87	-	-	-	-
Width	F	mm	-	138	-	138	-	-	-	-
Weight with flanges (approx.)		kg	-	6.3	-	6.3	-	-	-	-

**PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH**

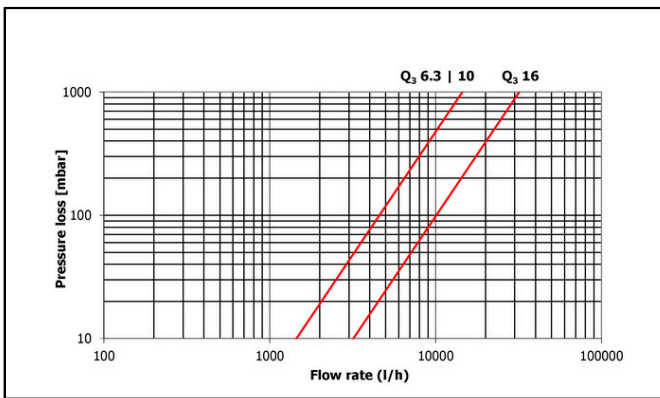

Pressure loss graph

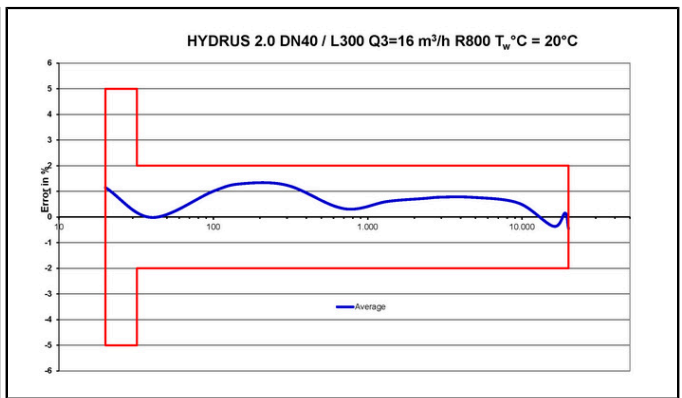

Typical error graph

## **Economic Actor Information**

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: [metering-germany-info@diehl.com](mailto:metering-germany-info@diehl.com)

Diehl Metering GesmbH  
Hainburger Straße 33  
A-1030 Vienna  
Austria  
Phone: +43 (0)1 716 70-0  
Fax: +43 (0)1 716 70-12  
[metering-austria-info@diehl.com](mailto:metering-austria-info@diehl.com)  
[www.diehl.com/metering](http://www.diehl.com/metering)

**EMPOWER A  
SUSTAINABLE  
FUTURE**