

SHARKY 774 COMPACT

ULTRASONIC COMPACT ENERGY METER



APPLICATION

The ultrasonic compact energy meter can be used for measuring the energy consumption in heating or cooling application for billing purposes. The measurement principle is static and based on the measurement of the transit time. Ultrasonic technology offers many benefits: no moving parts (avoids wear and tear of the metering components), low pressure loss, large metering dynamics and low start flowrate, insensitiveness to suspended particles.

FEATURES

- AMR Smart Meter
- M-Bus or wM-Bus Radio. Combined with Diehl Metering AMR System technology highest transmission performance is achievable
- Constantly high measuring rates (flow: 2 s; temp.: 16 s) with up to 12 years battery lifetime. Current power is calculated and updated every 2 s.
- AA-cells contain less lithium (0.7 g per piece) than A-cells.
- Springless battery contact (hard-solder) is corrosion-protected
- MID class 2 and PTB K7.2
- MID electromagnetic class E2 and mechanical class M2 – less sensitive to neg. influence, e.g. culprit PWM pump
- 8-digit LCD offers 3 fractional digits without risk of display overflow.
- Only 54 mm design height from pipe center, hence easy to install in compact heat stations

BASIC FEATURES

		SHARKY 774 compact	
Application		Heating - cooling - heating/with cooling tariff	
Approval		MID (DE-13-MI004-PTB008) and PTB K7.2 for cooling (DE-16-M-PTB-0041)	
Environmental class		Class C	
Ambient class		Class E2 + M2	
Ambient operating temperature	°C	+5 ... +55 (<35 °C have a positive effect on battery lifetime)	
Ambient storage temperature	°C	-25 ... +60 (>35 °C max. 4 weeks)	
Communication		M-Bus or radio	
Frequency band		868 or 434 MHz	
Type of radio telegram		Open Metering Standard (OMS)	
Transmission data updating		Online - no time delay between value measurement and data transmission	
Data transmission		Unidirectional	
Sending interval		Rapid mode (drive-by): 14 s + synchron telegram: 900 s standard mode (walk-by): 64 s + synchron telegram: 900 s	
Test possibilities		Via display, optical test pulses	

BASIC FEATURES - CALCULATOR

		SHARKY 774 compact	
Protection class		IP 65	
Battery supply		3.6 VDC (2xAA-cell), up to 12 years lifetime (at standard conditions of use and temperature)	
Battery ¹ lifetime - radio		Rapid mode: up to 7 years; standard mode: up to 11 years (depends on sending interval)	
Battery ¹ lifetime - M-Bus		Up to 12 years	
Temperature sensor type		Pt 500, 2-wire; Ø 5.2 mm	
Cable length of temperature sensor	m	1.45 / 1.95	
Absolute temperature range (heating)	Θ °C	1 ... 105 / 1 ... 130	
Absolute temperature range (cooling)	Θ °C	1 ... 50	
Measuring cycle - flow	T s	2	
Measuring cycle - temperature sensor	T s	16	
Starting temperature difference	ΔΘ K	0.125	
Min. temperature difference	ΔΘ _{min} K	3	
Max. temperature difference	ΔΘ _{max} K	90 / 120 (heating) 50 (cooling)	
Interfaces standard		Optical ZVEI interface	
Interfaces optional		M-Bus or radio	
Extensive readable data memory		Periodical log ² ; 3 history logs; event memory	

¹Battery exchangeable at lab² Programmable storage interval (daily, weekly, monthly, ...)

BASIC FEATURES - FLOW SENSOR

SHARKY 774 compact

Mounting position flow sensor	Any position, horizontal, riser or downpipe and overhead		
Protection class flow sensor	Heating IP 54 Heating with cooling tariff / cooling IP 68 (at normal ambient air pressure)		
Material of the flow sensor body	Brass		
Temperature range heating	°C	5 ... 105 / 5 ... 130	
Temperature range cooling	°C	2 ... 50	
Temperature range heating with cooling tariff	°C	5 ... 105	
Dynamic range (q_p/q_i)	1:100		
Useful range (q_s/q_p)	2:1		

* +130°C in option

DISPLAY

SHARKY 774 compact

Display indication	LCD, 8-digit		
Units	MWh - kWh - GJ - °C - m ³		
Total values	99,999,999 - 9,999,999.9 - 999,999.99 - 99,999.999		
Values displayed	Energy - Power - Volume - Flow rate - Temperature and more		

* MWh - GJ in option

INTERFACES


SHARKY 774 compact

Optical	ZVEI interface, for communication and testing, M-Bus protocol		
M-Bus	Configurable telegram, according to EN13757-3, data reading via two wires with non polarity (1.5 m), auto baud detect (300 and 2400 baud), galvanically isolated, one M-Bus load		
Wireless M-Bus	Open Metering Standard (OMS), Generation 3 Profile A or Generation 4 Profile B; frequency band 868 or 434 MHz		

TECHNICAL DATA FLOW SENSOR


Nominal flow rate	q_p	m ³ /h	0.6	1.5	1.5	2.5
Nominal diameter	DN	mm	15	15	20	20
Overall length	L	mm	110	110	130	130
Starting flow rate		l/h	1	2.5	2.5	4
Minimum flow rate	q_i	l/h	6	15	15	25
Maximum flow rate	q_s	m ³ /h	1.2	3	3	5
Overload flow rate		m ³ /h	2.5	4.6	4.6	6.7
Operating pressure	PN	bar	16	16	16	16
kv value (q_p^2 (m ³ /h) = kv ² x Δp (bar))			1.95	4.33	5.48	7.91
Pressure loss at q_p	Δp	mbar	95	120	75	100

DIMENSIONS THREAD VERSION

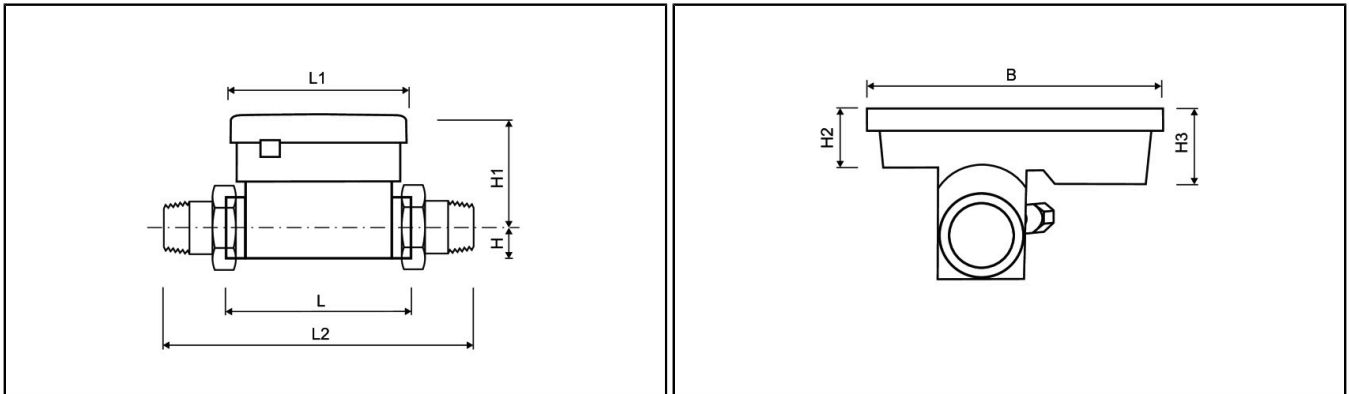

Nominal flow rate	q _p	m ³ /h	0.6	1.5	1.5	2.5
Nominal diameter	DN	mm	15	15	20	20
Overall length	L	mm	110	110	130	130
Overall length with coupling	L2	mm	190	190	230	230
Length of calculator	L1	mm	90	90	90	90
Height	H	mm	14.5	14.5	18	18
Height	H1	mm	55	55	58	58
Height of calculator	H2	mm	27	27	27	27
Height of calculator	H3	mm	40	40	40	40
Width of calculator	B	mm	135	135	135	135
Connection thread on meter	Inch		G ³ / ₄ B	G ³ / ₄ B	G1B	G1B
Connection thread of coupling	Inch		R ¹ / ₂	R ¹ / ₂	R ³ / ₄	R ³ / ₄
Weight	kg		0.70	0.70	0.77	0.77

PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH

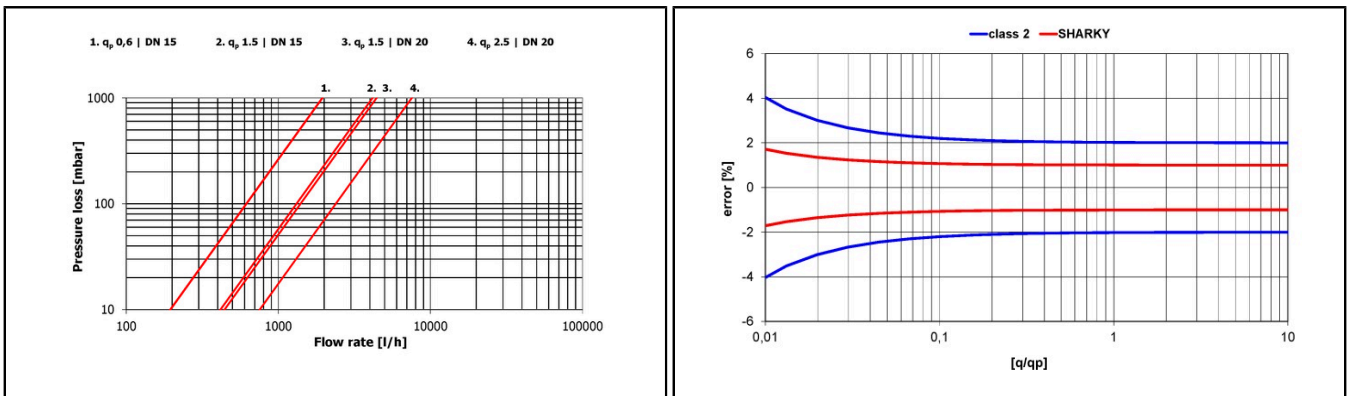

REACH

Information pursuant to Article 33 (1) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006:

This product series contains articles with the following substances in a concentration of more than 0.1% weight by weight (w/w):

- Lead (CAS no.: 7439-92-1)
- Lead titanium zirconium oxide (CAS no.: 12626-81-2)
- Octamethylcyclotetrasiloxane (CAS no.: 556-67-2)
- Decamethylcyclopentasiloxane (CAS no.: 541-02-6)
- Dodecamethylcyclohexasiloxane (CAS no.: 540-97-6)

Economic Actor Information

Applicable regulation and legal obligations for products may change.

DIEHL METERING monitors applicable regulation to ensure their products comply at the date of placing on the market.

Each economic actor making products available on the market thereafter must independently keep informed about the current applicable regulation.

For questions, please contact: metering-germany-info@diehl.com

Diehl Metering S.A.S.
Head Office
67 rue du Rhône
BP 10160
FR-68304 Saint-Louis Cedex
Phone: + 33 (0)3 89 69 54 00
Fax: + 33 (0)3 89 69 72 20
metering-France-info@diehl.com

International Sales
67 rue du Rhône
BP 10160
FR-68304 Saint-Louis Cedex
Phone: + 33 (0)3 89 69 54 21
Fax: + 33 (0)3 89 69 54 22
metering-France-export@diehl.com
www.diehl.com/metering

**EMPOWER A
SUSTAINABLE
FUTURE**