

WESAN WPV A (PHASED OUT)

Bulk Water Meter | Woltman

DIEHL
Metering



APPLICATION

Meter for measuring heavily fluctuating flow rates.

FEATURES

- ▶ Ideal design of housing and housing cover prevents sedimentation, stagnant water and air pockets
- ▶ No measuring errors in the switch-over range
- ▶ Good long-term measuring accuracy
- ▶ Complete head unit with counter and sensors can be rotated by 350° for easier reading
- ▶ Main meter and bypass meter are prepared for connection of two reed switch and one opto transmitter
- ▶ In order to secure a safe switch-over the WESAN WPV A needs a minimum ingoing pressure of 0.6 bar

WESAN WPV A (PHASED OUT)

Bulk Water Meter | Woltman

GENERAL

WESAN WPV A			
Medium temperature range	°C	1 ... 30	
Temperature safety	°C	1 ... 50	
Ambient operating temperature	°C	1 ... 55	
Ambient storage temperature	°C	1 ... 55	
Nominal pressure	PN	bar	16 ¹
Display range	0.05 l ... 99,999 m ³		
Protection class	IP 65		
Available bypass meter	CORONA DP		

¹ versions with different nominal pressure on request (see also special versions)

TECHNICAL DATA

Nominal diameter	DN	mm	150
Permanent flow rate	Q ₃	m ³ /h	160
Minimum flow rate	Q ₁	l/h	400
Transitional flow rate	Q ₂	l/h	640
Overload flow rate	Q ₄	m ³ /h	200
Starting flow rate		l/h	60 - 70
Permanent flow rate bypass meter	Q ₃	m ³ /h	16
Switch-over flow rate rising		l/h	4450
Switch-over flow rate falling		l/h	7750



APPROVAL

Nominal diameter	DN	mm	150
MID (DE-17-MI001-PTB003)			•
Dynamic range bypass meter			
CORONA DP (Q ₃ /Q ₁)	R		400 H
Potable water			KTW / W270

WESAN WPV A (PHASED OUT)

Bulk Water Meter | Woltman

DIMENSIONS

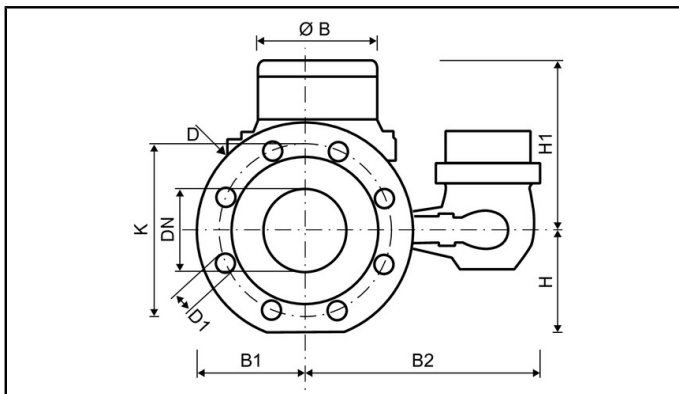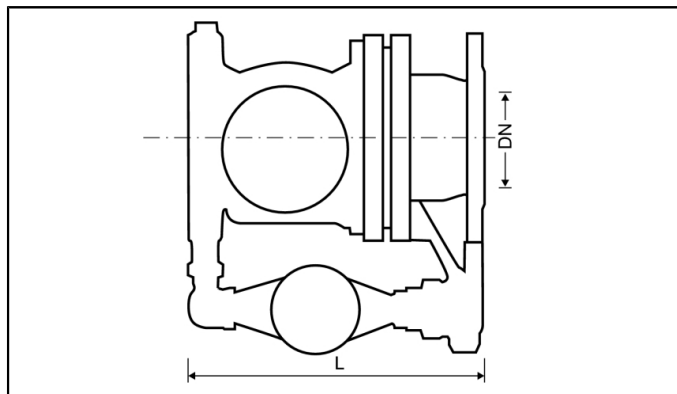


Nominal diameter	DN	mm	150
Overall length (DIN 19625)	L	mm	500 ± 15
Flange diameter	D	mm	285
Hole circle diameter	K	mm	240
Number of screwholes		pcs	8
Screwhole diameter	D1	mm	22
Height	H	mm	150
Height	H1	mm	230
Height to remove measuring insert		mm	475
Width	B1	mm	143
Width	B2	mm	290
Diameter	Ø B	mm	115
Weight of complete meter		kg	68


SPECIAL VERSIONS

- Versions with different nominal pressure on request
- Special flange holes on request

PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH

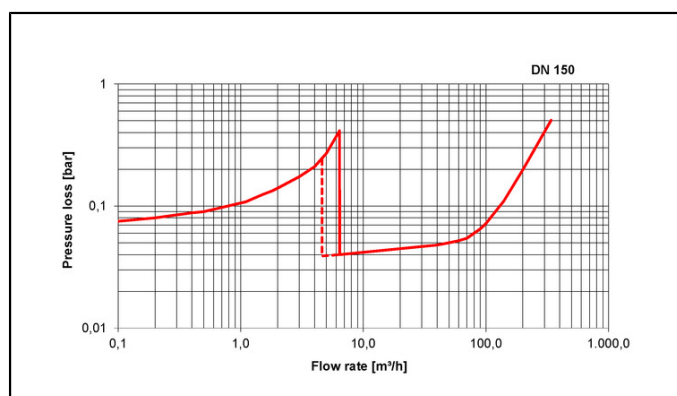

Pressure loss graph

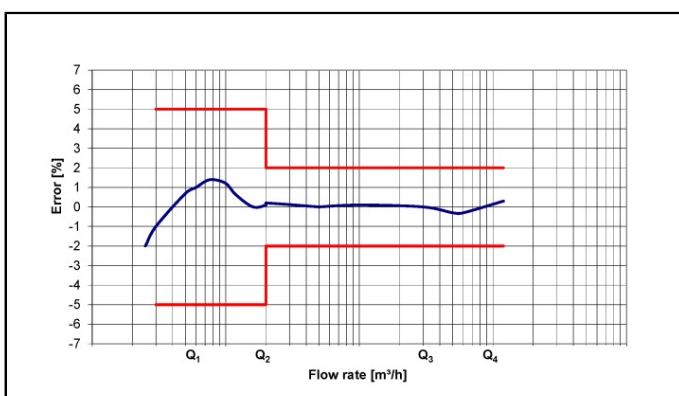

Typical error graph